


PERFORMA

349001 – NON-CONCUSSIVE BASIN TAP PAIR

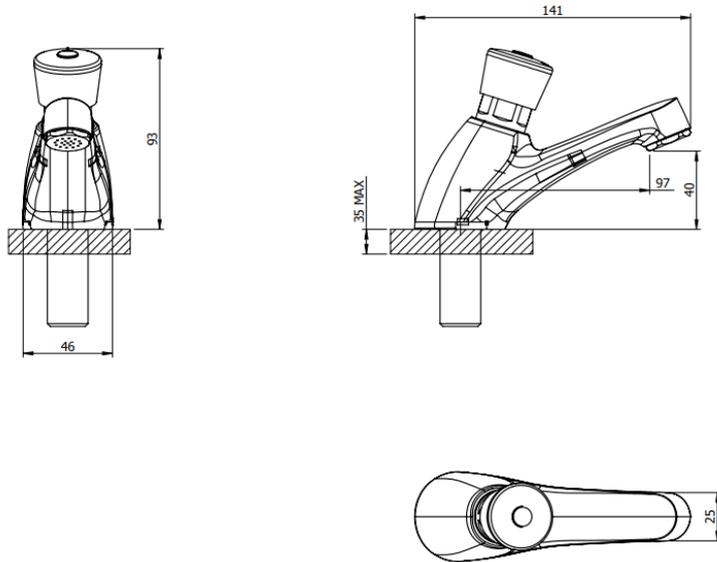

Specification

Finish	Chrome
Body	Brass
Fittings	Metal Backnut & Washer
Connection	½" BSP threaded tail

Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	85°C

Flow rates

Pressure	0.1	0.5	1	3
Aerator				
F/Straight	2.4	8.3	12.3	22.8

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Features & Benefits

5 YEAR Guarantee	Low Pressure	Metal Backnut	Flow Straightener
Single Flow			

Certifications

Tested at 0.2 bar	2301029 – Jan 28