


PERFORMA

42155 – NON-CONCUSSIVE BASIN TAP

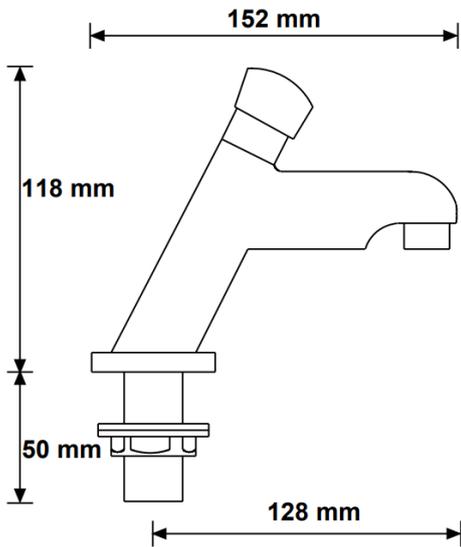

Specification	
Finish	Chrome
Body	Brass
Fittings	Metal Backnut & Washer
Connection	½" BSP threaded tail

Min dynamic pressure	0.1
Max dynamic pressure	6
Max static pressure	16
Max water temperature	65°C

Flow rates				
Pressure	0.1	0.5	1	3
Aerator				
F/Straight				

All Pressures in Bar. All flow in L/Min.
 Dimensions supplied are nominal and subject to tolerance.
 Inclusion or restrictors (sold separately unless stated) will affect flow rate result.
 Performance details are based on trials under test conditions and for guidance only.
 The Company reserves the right to change product specification without prior notice.

Certifications

Features & Benefits

<p>5 YEAR Guarantee</p>	<p>L Low Pressure</p>	<p>Metal Backnut</p>	<p>Flow Straightener</p>
<p>Single Flow</p>			