

# Markwik 21+ Panel Mounted Thermostatic Basin Mixer, Sequential Lever

## ILLUSTRATED

**A6735** (TB H2A) Markwik 21+ panel mounted thermostatic basin mixer, single sequential lever, demountable with fixed spout

## OPTIONS

- A6899** Markwik 21+ purging kit for panel mounted thermostatic mixers
- A6255** Inlet protection caps for prolonged demount
- A6252** (TB H6) 100mm short projection spout

## ILLUSTRATED PRODUCT DETAILS

### Weights

**A6735** 3.60 KG

### Finishes

**A6735**  Chrome (AA)

### Materials

**A6735** Chrome Plated Brass

### Flow rates

**A6735** 11.2 Litres per minute @ 3 bar pressure

### Standards



TMV3 meets the requirements of the NHS Model Engineering Specification-D08 Valves.

HTM 04-01 supplement D08, HBN 00-10

### Special Notes

TMV3 meets the requirements of the NHS Model Engineering Specification-D08 Valves.

Suitable for high and low pressure (0.2 Bar to 5 Bar). A separate purging kit is available to facilitate installation flushing and water sampling.

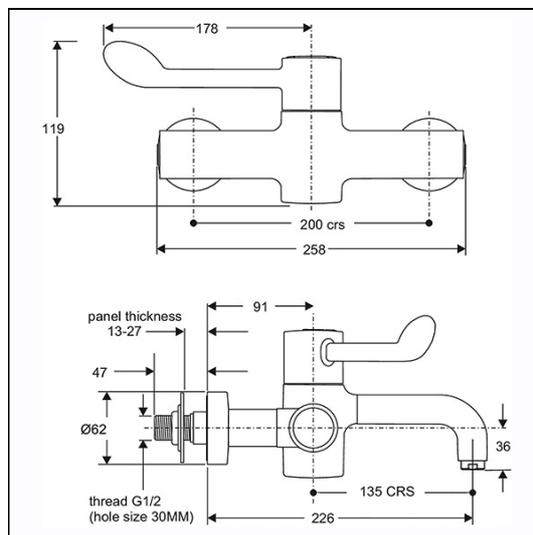

## ACCREDITATIONS



## FEATURES

