




AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 0195

ISSUED: 10-05

REVISED: 02 MAR 2020

SURFACE MOUNTED SENSOR HAND DRYER WITH CAST IRON COVER (Pg 1 of 2)

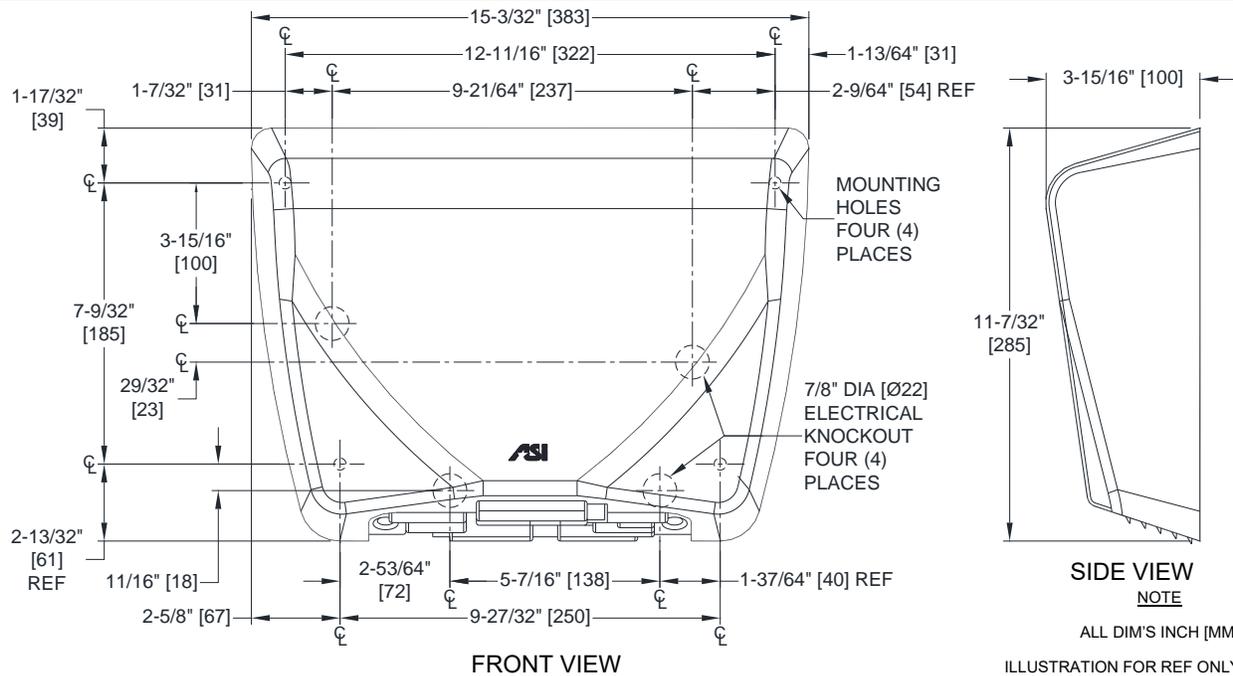

SIDE VIEW
NOTE

ALL DIM'S INCH [MM]

ILLUSTRATION FOR REF ONLY AND NTS

FOR CLEANING INSTRUCTIONS SEE APPROPRIATE SECTIONS IN PRODUCT CARE & MAINTENANCE BULLETIN (PCM) ON ASI WEBSITE

SPECIFICATION

Surface Mounted Sensor Hand Dryer With Cast Iron Cover shall operate automatically from IR sensor that shall activate dryer when hands are placed in sensor zone. Motor and heating element shall have internal resetting automatic thermal protection. Cover shall be fabricated of one-piece, heavy-duty cast iron 1/4" [6,4] thick, and shall have all exposed surfaces finished with acid, chip and scratch resistant porcelain enamel. Fixed directional air vanes shall be heavy duty, rust proof and tamper resistant. Air intake slots shall not allow access to internal parts. Back plate shall be furnished with vibration isolating mounting bushings. Circuitry shall have self-adjusting time-out and fail-safe off protection controlled by a microprocessor that shall detect and reject false signals and shall automatically self calibrate to provide uniform sensitivity over its entire life span. Entire unit shall be internally electrically grounded. Dryer unit shall have C-UL-US® approval and be listed under the re-examination services of Underwriters Laboratories, Inc. Unit shall be warranted against defects in materials or workmanship for ten (10) years.

Surface Mounted Sensor Hand Dryer With Cast Iron Cover shall be Model № 0195 of American Specialties, Inc. 441 Saw Mill River Road Yonkers, New York 10701-4913

INSTALLATION

Unit is surface mounted on wall with four (4) 1/4" screws, washers and bushings (supplied) through rubber grommets (supplied) in a corrosion protected formed heavy steel back plate into suitable prepared mountings (by others) or other suitable mounting hardware (by others) to suit wall conditions. For masonry walls use expansion bolts or anchors for 1/4" (6) screws. Electric service of 100-240VAC 20A 50/60 Hz (provided by others) is brought to RWO at location for dryer indicated on diagram above and is hooked up (by others) in accordance with schematic and Owner's Manual provided with unit. Electrical service is supplied and connected (by others) prior to installing cover. Cover is secured to back plate with two (2) hex socket security screws (supplied). For compliance with ICC/ANSI A-117.1-2003 and 2010 ADA Accessibility Standards for adults, install unit with bottom of sensor lens 48" [1219] max AFF (Above Finished Floor) if unobstructed reach access is provided or 44" [1118] max AFF if forward reach over an obstruction (e.g. vanity or commode) with reach depth greater than 20" [508] and less than 25" [635] is only provided. For general utility install unit so that bottom edge of dryer is 54" to 56" [1372 to 1422] AFF. For two or more dryers, dryers should be no closer than 24" [610] on center. See OM and Template MT & IG supplied with unit.

OPERATION

Dryer is activated by user placing hands under sensor. LED in sensor array shines blue light during operation to guide user to optimal hand placement for shorter drying time. Dryer automatically shuts off after time-out when user removes hands from sensor zone.



AMERICAN SPECIALTIES, INC.
 441 Saw Mill River Road, Yonkers, NY 10701
 (914) 476.9000 • (914) 476.0688
 www.americanspecialties.com

MODEL №: 0195

ISSUED: 10-05

REVISED: 02 MAR 2020


SURFACE MOUNTED SENSOR HAND DRYER WITH CAST IRON COVER (Pg 2 of 2)

RATINGS

MODEL	TYPE	TIMING	SUPPLY	AMPS (MAX)	WATTS	COLOR
0195	Hand	Automatic	115 VAC 50/60Hz	17.6	2022	White
			208 VAC 50/60Hz	15.9	1654	
			120 VAC 50/60Hz	18.3	2200	

MODEL	MOTOR	H/P	RPM x1000	FAN TYPE	AIR FLOW	HEATING ELEMENT	AIR OUTPUT TEMPERATURE	SOUND PRESSURE	DRYING TIME
0195	Brush Type Dual Ball Bearings	.25	75	Single Inlet Centrifugal	185 CFM (314.5 m3/h)	1857 Watt Nichrome wire with auto reset circuit breaker @ 115VAC	149° F (65°) @ 77° F (25°) Ambient room temperature	65 dB-A @ 2M	Less Than 25 Seconds
						1519 Watt Nichrome wire with auto reset circuit breaker @ 104VAC			
						2020 Watt Nichrome wire with auto reset circuit breaker @ 240VAC			

Circuit Diagram

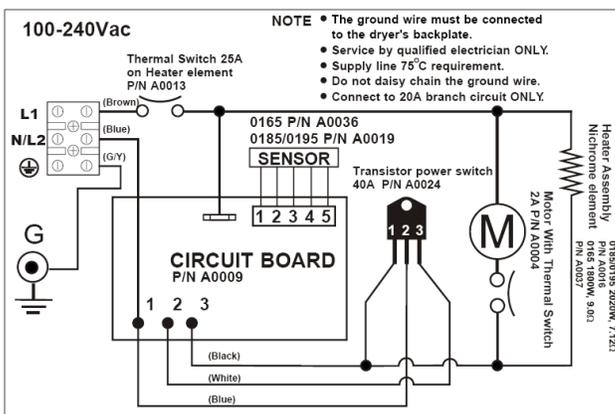

Installation Diagram

