

# Contour 21 Lever Operated Exposed Thermostatic Shower Mixer

## ILLUSTRATED

**A4130** Contour 21 thermostatic exposed shower mixer, lever operated

## OPTIONS

**B8634** Fast Fix wall bracket for Bar Valves with 150mm pipe centres

## ILLUSTRATED PRODUCT DETAILS

### Weights

**A4130** 2.90 KG

### Finishes

**A4130**  Chrome (AA)

### Materials


**A4130** Chrome Plated Brass

### Flow rates

**A4130** 4.7 Litres per minute @ 3 bar pressure

### Special Notes

Operating pressures from 0.2 to 5.0 bar. Suitable for use with either Trevi or Outline power shower kits TMV Thermostatic Mixing Valve Scheme approved. Meeting the requirements of the NHS Model Engineering Specification - D 08 for Type 3 valves. Inlet isolation valves allow front of panel servicing. Flow rate 6 litres per minute at 0.2 bar.

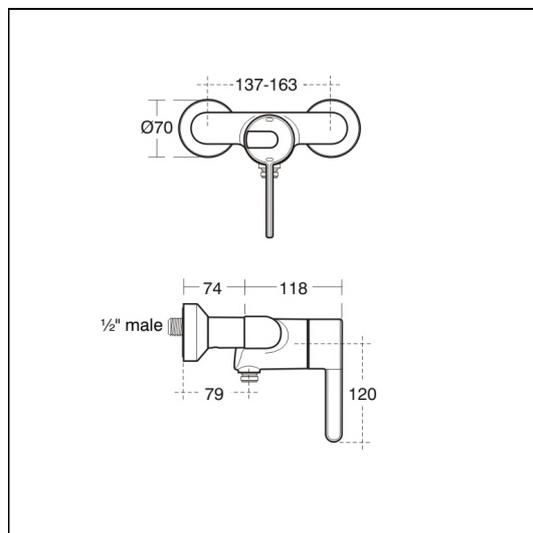

## ACCREDITATIONS



## FEATURES

