

Sensorflow 21 Washbasin Variable Temperature Mixer Electronic Sensor, Mains

ILLUSTRATED

A4176 Sensorflow 21 washbasin mounted mixer with adjustable temperature integral sensor, anti-vandal laminar flow outlet, copper tube inlet, servicing valve and filter, mains

ILLUSTRATED PRODUCT DETAILS

Weights

A4176 3.90 KG

Finishes

A4176  Chrome (AA)

Materials

A4176 Chrome Plated Brass

Flow rates


A4176 3.7 Litres per minute @ 3 bar pressure

FINISH OPTIONS



Special Notes

All spouts supplied complete with individual solenoid valve, copper tube inlet and combined servicing valve and filter. Spouts with integral sensors detect hands within the sensing range and the solenoid valve is opened. Automatically shuts off if sensor is obstructed for a maximum of 50 seconds. Mains powered transformer with option to link up to 5 link units per main unit alternatively there are stand alone battery powered units. Flow rate regulated to 3.7 litres per minute at 1 bar minimum. Low pressure flow straightener available (B960860NU) which delivers 5 litres per minute at 0.1 bar pressure.

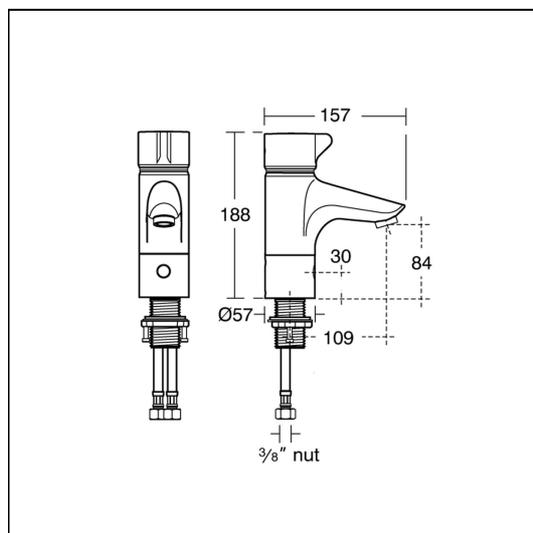

ACCREDITATIONS

A4176(AA)

Unified Water Label



3.70 Litres Per Minute

FEATURES

