


SHOWER PANEL

AQUA621 | 2000101034

ARTICLE GROUP (AG) : **AQUA621 ++** | ARTICLE FAMILY (AF) : **Electronic self closing shower** | PRODUCT GROUP (PG) : **Showers** | MODEL RANGE : **AQUA**

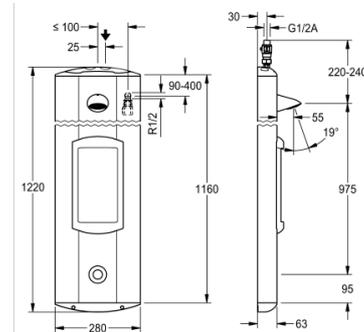

AQUATIMER - A3000 open stainless steel shower panel for on-wall installation, with electronic time control and facility for chargeable water delivery with AQUAPAY coin-operated controllers and for externally controlling the options such as fitting settings and communication via ECC function controller. For connection to pre-mixed warm or cold water. Adjustable flow duration, down to the second. With waterproof electronic module, solenoid valve, flexible high pressure hose connection with lockable water quantity regulator and dirt strainer, waterproof electric T-junction for connection to system cable, piezo switch with start/stop function and AQUAJET Slimline shower head with plastic jet face and flow volume regulator 0,20 l/s (0,15 l/s, enclosed). Installed in housing made of profiled stainless steel with integrated soap tray and plastic profile cover caps, visible fitting parts polished chromium-plated, 24 V DC.

TECHNICAL DATA

additional connections	no
calculation flow rate cold water	0,20 litre per second
circulation	no
connection with pay water dispenser	single / multiple pay water dispenser
default automatic hygiene flushing	24H-AFTER-ACTIVITY
default flow time	30,00 seconds
adjustable flow time	yes
functional principle	ELECTRONIX-C
gross weight	9,20 kg
diameter nominal	DN 15
material casing	stainless steel
material code casing	1.4301 Chrome Nickel steel V2A
material fitting	synthetic
maximum flow time	6 500,00 seconds
minimum flow pressure	1,00 bar
minimum flow time	1,00 seconds
type of mixing	No
overall depth	63,00 mm
overall height	1 220,00 mm
overall width	280,00 mm
power supply connection	A3000 open 24 V DC
position of power connection	from top / backside
power consumption	1,5


protective system IP	IP68
protective shutdown	NO
shower pipe draining	no
sound insulation	no
surface finish casing	satin finished
thermal disinfection	prepared for automatic thermal disinfection
adjustable tilt angle	no
type of fitting	for stainless steel panelling
type of mounting	WALL-MOUNTING
type of operation	SENSOR-OPERATION
type of sensor	piezo-electronic sensor
type of shower	shower panel
type of shower head	spray shower head
volume flow rate at 3 bar	0,20 litre per second
position of water connection	from top / backside
net weight	8,74 kg
hygiene flushing	yes
inlet size	G-1-2-A

SHOWER PANEL

AQUA621 | 2000101034


ARTICLE GROUP (AG) : **AQUA621 ++** | ARTICLE FAMILY (AF) : **Electronic self closing shower** | PRODUCT GROUP (PG) : **Showers** | MODEL RANGE : **AQUA**

ACCESSORIES




**HOUSING EXTENSION
FOR SHOWER PANEL**

2000100366




**HOUSING EXTENSION
FOR SHOWER PANEL**

2000100367




**HOUSING EXTENSION
FOR SHOWER PANEL**

2000100369




**HOUSING EXTENSION
FOR SHOWER PANEL**

2000100370




**HOUSING EXTENSION
FOR SHOWER PANEL**

2000100371



**HOUSING EXTENSION
FOR SHOWER PANEL**

2000100372



**HOUSING EXTENSION
FOR SHOWER PANEL**

2000100373



CONNECTING ADAPTER


2000101441



**HOUSING EXTENSION
FOR SHOWER PANEL**

2000106149

MANDATORY ACCESSORY



CABLE: ZAQUA077

2000100801

CABLE: ZAQUA078


2000100852

CABLE

2000104272

CABLE


2000104274



**ECC2 FUNCTION
CONTROLLER**

2000108123

SPARE PARTS



SOLENOID VALVE

2000101328
