


SHOWER PANEL

AT300041 | 2030019650

PRODUCT GROUP (PG) : Showers | ARTICLE FAMILY (AF) : Electronic self closing shower | ARTICLE GROUP (AG) : AT300041 ++ | MODEL RANGE : AQUA

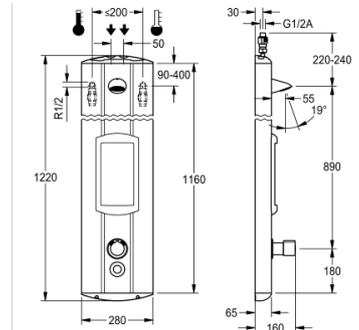

AQUATIMER - A3000 open shower panel made of stainless steel for on-wall installation with electronic time control and thermostatic mixer DN 15. With shower head AQUAJET-Slimline with plastic jet face and flow controller 0.20 l/s (0.15 l/s enclosed), flexible high pressure hose connections with lockable water quantity regulators, thermostat with metal grip cap, for connection to hot and cold water adjustable flow duration, down to the second, visible parts of fitting polished chromium-plated brass, housing made of profiled stainless steel with integrated soap tray and plastic profile cover caps. Provides facility for thermal disinfection, manual or automatic via optional bypass solenoid cartridge, as well as the facility for chargeable water delivery with AQUAPAY coin-operated controller and for externally controlling the options such as fitting settings and communication via ECC function controller, 24 V DC.

Dimensions of housing 280 x 1220 x 65 mm (W x H x D)

TECHNICAL DATA

gross weight	13,40 kg
net weight	10,30 kg
additional connections	no
calculation flow rate cold water	0,15 litre per second
calculation flow rate hot water	0,15 litre per second
circulation	no
connection with pay water dispenser	single / multiple pay water dispenser
default automatic hygiene flushing	24H-AFTER-ACTIVITY
default flow time	30,00 seconds
adjustable flow time	yes
functional principle	ELECTRONIX-C
diameter nominal	DN 15
material casing	stainless steel
material code casing	1.4301 Chrome Nickel steel V2A
material fitting	BRASS
maximum flow time	6 500,00 seconds
minimum flow pressure	1,00 bar
minimum flow time	1,00 seconds
type of mixing	with thermostat
overall depth	65,00 mm
overall height	1 220,00 mm
overall width	280,00 mm
power supply connection	A3000 open 24 V DC


position of power connection	from top / backside
power consumption	2,5
protective system IP	IP68
protective shutdown	NO
shower pipe draining	no
sound insulation	no
surface finish casing	satin finished
surface finish fitting	CHROMISED
thermal disinfection	prepared for automatic thermal disinfection
adjustable tilt angle	no
type of mounting	WALL-MOUNTING
type of operation	SENSOR-OPERATION
type of sensor	piezo-electronic sensor
type of shower	shower panel
type of shower head	spray shower head
volume flow rate bypass	0,06 litre per second
volume flow rate at 3 bar	0,20 litre per second
position of water connection	from top / backside
hygiene flushing	yes
inlet size	G-1-2-A

SHOWER PANEL

AT300041 | 2030019650


PRODUCT GROUP (PG) : Showers | ARTICLE FAMILY (AF) : Electronic self closing shower | ARTICLE GROUP (AG) : AT300041 ++ | MODEL RANGE : AQUA

ACCESSORIES




HOUSING EXTENSION FOR SHOWER PANEL

2000100366




HOUSING EXTENSION FOR SHOWER PANEL

2000100367




HOUSING EXTENSION FOR SHOWER PANEL

2000100369




HOUSING EXTENSION FOR SHOWER PANEL

2000100370




HOUSING EXTENSION FOR SHOWER PANEL

2000100371




HOUSING EXTENSION FOR SHOWER PANEL

2000100372



HOUSING EXTENSION FOR SHOWER PANEL

2000100373



HOUSING EXTENSION FOR SHOWER PANEL

2000100374



SOLENOID VALVE CARTRIDGE : ZAQUA015

2000100431



TEMPERATURE SENSOR : ZAQUA017

2000100972



CONNECTING ADAPTER


2000101441



HOUSING EXTENSION FOR SHOWER PANEL

2000106149

MANDATORY ACCESSORY



CABLE: ZAQUA077

2000100801

CABLE: ZAQUA078


2000100852

CABLE

2000104272

CABLE

2000104274



**ECC2 FUNCTION
CONTROLLER**

2000108123

SPARE PARTS



**SOLENOID VALVE
CARTRIDGE : ZAQUA015**

2000100431
