


# PROTRONIC - A3000 open shower panel

MODEL RANGE: AQUATIMERA3000OPEN | AT300042 | 2030019715

Showers | Electronic self closing shower

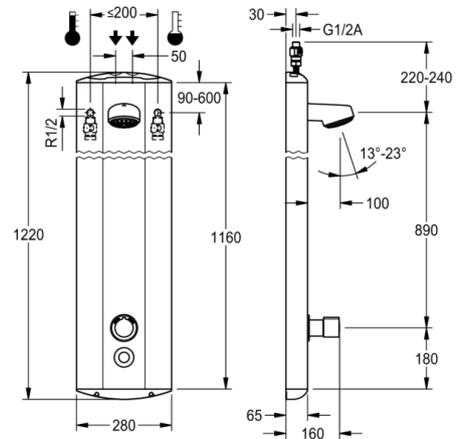

AQUATIMER - A3000 open shower panel made of stainless steel for on-wall installation with electronic time control and thermostatic mixer DN 15. With shower head AQUAJET-Comfort with plastic jet face, infinitely angle-adjustable plastic jet face 13° - 23° and flow controller 0.15 l/s (0.10 l/s and 0.20 l/s enclosed), flexible high pressure hose connections with lockable water quantity regulators, thermostat with metal grip cap, for connection to hot and cold water adjustable flow duration, down to the second, visible parts of fitting polished chromium-plated brass, housing made of profiled stainless steel with plastic profile cover caps. Provides facility for thermal disinfection, manual or automatic via optional bypass solenoid cartridge, as well as the facility for chargeable water delivery with AQUAPAY coin-operated controller and for externally controlling the options such as fitting settings and communication via ECC function controller, 24 V DC.

Dimensions of housing 280 x 1220 x 65 mm (W x H x D)

Technical data	
Overall depth	65.00 mm
Overall height	1,220.00 mm
Overall width	280.00 mm
Type of operation	Sensor operation
Protective system IP	68
Diameter nominal	DN 15
Inlet size	G-1-2-A
Type of mixing	Thermostat
Calculation flow rate cold water	0.15 liter per second
Calculation flow rate hot water	0.15 liter per second
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.20 liter per second
Adjustable flow time	Yes
Functional principle	Electronic self-closing
Protective shutdown	No
Thermal disinfection	Prepared for automatic thermal disinfection
Default automatic hygiene flushing	24h after the last activity
Power supply connection	A3000 open 24 V DC
Type of sensor	Piezo-electronic sensor
Adjustable tilt angle	Yes
Type of shower head	Spray shower head
Position of power connection	Top backside
Connection with pay water dispenser	Single
Shower pipe draining	No
Position of water connection	From top / backside
Material code casing	1.4301 Chrome Nickel steel V2A
Surface finish casing	Satin finished
Volume flow rate bypass	0.06 liter per seconds
Maximum flow time	6,500.00 seconds
Minimum flow time	1.00 seconds
Default Water Systems	30.00 seconds



# PROTRONIC - A3000 open shower panel

MODEL RANGE: AQUATIMERA3000OPEN | AT300042 | 2030019715

Showers | Electronic self closing shower

## Accessory Mandatory



System cable

2000100801  
ZAQUA077



System cable

2000100852  
ZAQUA078



AQUA3000 open system cable

2000104272  
ZAQUA011



System cable

2000104274  
ZAQUA012



ECC2 function controller

2000108123  
ZA3OP0011

## Accessory Optional



Housing extension

2000100366  
ZAQUA062



Housing extension

2000100367  
ZAQUA063



Housing extension

2000100369  
ZAQUA064



Housing extension

2000100370  
ZAQUA065

# PROTRONIC - A3000 open shower panel

MODEL RANGE: AQUATIMERA3000OPEN | AT300042 | 2030019715

Showers | Electronic self closing shower

## Accessory Optional



Housing extension

2000100371

ZAQUA066



Housing extension

2000100372

ZAQUA067



Housing extension

2000100373

ZAQUA068



Housing extension

2000100374


ZAQUA069



Bypass solenoid valve cartridge

2000100431


ZAQUA015



Screw-in temperature sensor

2000100972

ZAQUA017



Shower gel dish

2000100978

AQRM968



Connection adapter

2000101441

AQRM928



Housing extension

2000106149

ZAQUA089

# PROTRONIC - A3000 open shower panel

MODEL RANGE: AQUATIMERA3000OPEN | AT300042 | 2030019715

Showers | Electronic self closing shower

---

## Spare Parts

---



---

### Bypass solenoid valve cartridge

2000100431

ZAQUA015

---