


AQUATIMER - A3000 open shower panel

MODEL RANGE: AQUATIMERA3000OPEN | AT300047 | 2030019832

Showers | Electronic self closing shower

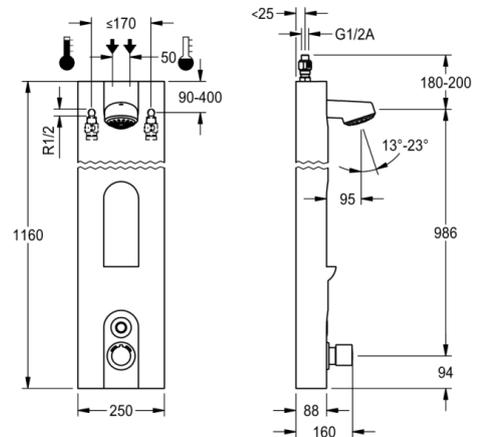

AQUATIMER - A3000 open shower panel made of mineral material for on-wall installation with electronic time control and thermostatic mixer DN 15. With shower head AQUAJET-Comfort with plastic jet face, infinitely angle-adjustable plastic jet face 13° - 23° and flow controller 0.15 l/s (0.10 l/s and 0.20 l/s enclosed), flexible high pressure hose connections with lockable water quantity regulators, thermostat with metal grip cap, for connection to hot and cold water adjustable flow duration, down to the second, visible parts of fitting polished chromium-plated brass. Revisable housing made of MIRANIT-S polyester resin-bonded mineral material with integrated soap dish, with smooth, pore-free surface, satin finished (temperature-resistant up to 80°C), Solid white colour. Provides facility for thermal disinfection, manual or automatic via optional bypass solenoid cartridge, as well as the facility for chargeable water delivery with AQUAPAY coin-operated controller and for externally controlling the options such as fitting settings and communication via ECC function controller, 24 V DC.

Dimensions of housing 250 x 1160 x 88 mm (W x H x D)

Technical data	
Overall depth	90.00 mm
Overall height	1,160.00 mm
Overall width	247.00 mm
Type of operation	Sensor operation
Protective system IP	68
Diameter nominal	DN 15
Inlet size	G-1-2-A
Material casing	Mineral material
Material fitting	Brass
Type of mixing	Thermostat
Calculation flow rate cold water	0.15 liter per second
Calculation flow rate hot water	0.15 liter per second
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.20 liter per second
Adjustable flow time	Yes
Functional principle	Electronic self-closing
Protective shutdown	No
Thermal disinfection	Prepared for automatic thermal disinfection
Default automatic hygiene flushing	24h after the last activity
Power supply connection	A3000 open 24 V DC
Type of sensor	Piezo-electronic sensor
Adjustable tilt angle	Yes
Type of shower head	Spray shower head
Position of power connection	Top backside
Connection with pay water dispenser	Single
Position of water connection	From top / backside
Volume flow rate bypass	0.06 liter per seconds
Maximum flow time	6,500.00 seconds
Minimum flow time	1.00 seconds
Blank Water Systems www.franke.com 2019-05-09	30.00 seconds



FRANKE

AQUATIMER - A3000 open shower panel

MODEL RANGE: AQUATIMERA3000OPEN | AT300047 | 2030019832

Showers | Electronic self closing shower

Accessory Mandatory



System cable

2000100801

ZAQUA077



System cable

2000100852

ZAQUA078



AQUA3000 open system cable

2000104272

ZAQUA011



System cable

2000104274

ZAQUA012



ECC2 function controller

2000108123

ZA3OP0011

Accessory Optional



Screw-in temperature sensor

2000100972

ZAQUA017



Housing extension

2000104333

ZSHOW0001



Housing extension

2000104334

ZSHOW0002



Housing extension

2000104335

ZSHOW0003

AQUATIMER - A3000 open shower panel

MODEL RANGE: AQUATIMERA3000OPEN | AT300047 | 2030019832

Showers | Electronic self closing shower

Accessory Optional



Housing extension

2000104336

ZSHOW0004



Housing extension

2000104337

ZSHOW0005

Spare Parts



Bypass solenoid valve cartridge

2000100431

ZAQUA015
