


**INSTALLATION INSTRUCTIONS
& WARRANTY LEAFLET**

D02165. D02166. D02167. D02168.

- * Center 5mm Pivot Door 700 x 1850 CL/CH
- * Center 5mm Pivot Door 760 x 1850 CL/CH
- * Center 5mm Pivot Door 800 x 1850 CL/CH
- * Center 5mm Pivot Door 900 x 1850 CL/CH

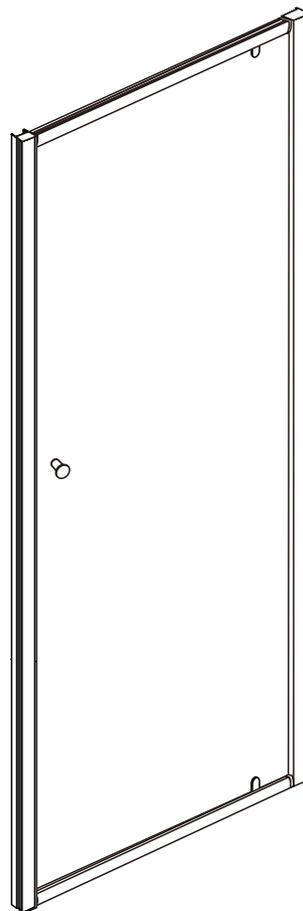

IMPORTANT

Please familiarise yourself with the fitting instructions before commencing fitting.

- 1 Check that you have the tools required
- 2 Check that the installation site is compatible with size of door supplied
- 3 Check all the enclosure components
- 4 Check that the installation kit is complete









DO NOT attempt to install the product unless you can tick **ALL 4** boxes as satisfactory.

The wall plugs supplied with the installation kit are for use in solid walls. Hollow or 'stud-partition' walls will require alternative fixings.


Please consult a hardware supplier for the correct type.

It may also be necessary to consult your tiling supplier about the correct method for drilling your tiles.



Tools Required

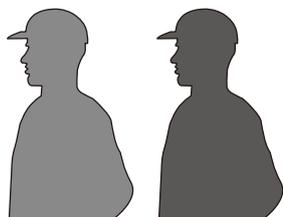


This product is heavy and may require two people to install.



◆ Box Contents

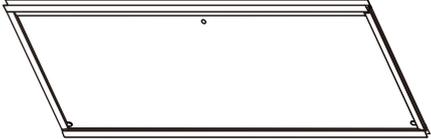
1xInstallation Instruction.	➔	
[1] 12xScrew Cover Caps.		
[2] 6xScrews ST3.5x8.	➔	
[3] 6xWall Plugs. [4] 6xScrews ST4x35.	➔	
[5] 1xDoor Panel.	➔	
[6] 1xhandle.	➔	
[7] 1xDeflector [8] 2xWater Deflectors.	➔	
[9] 2xWall Posts.	➔	
[10] 4xProfile Covers.	➔	

◆ Assembly Drawing

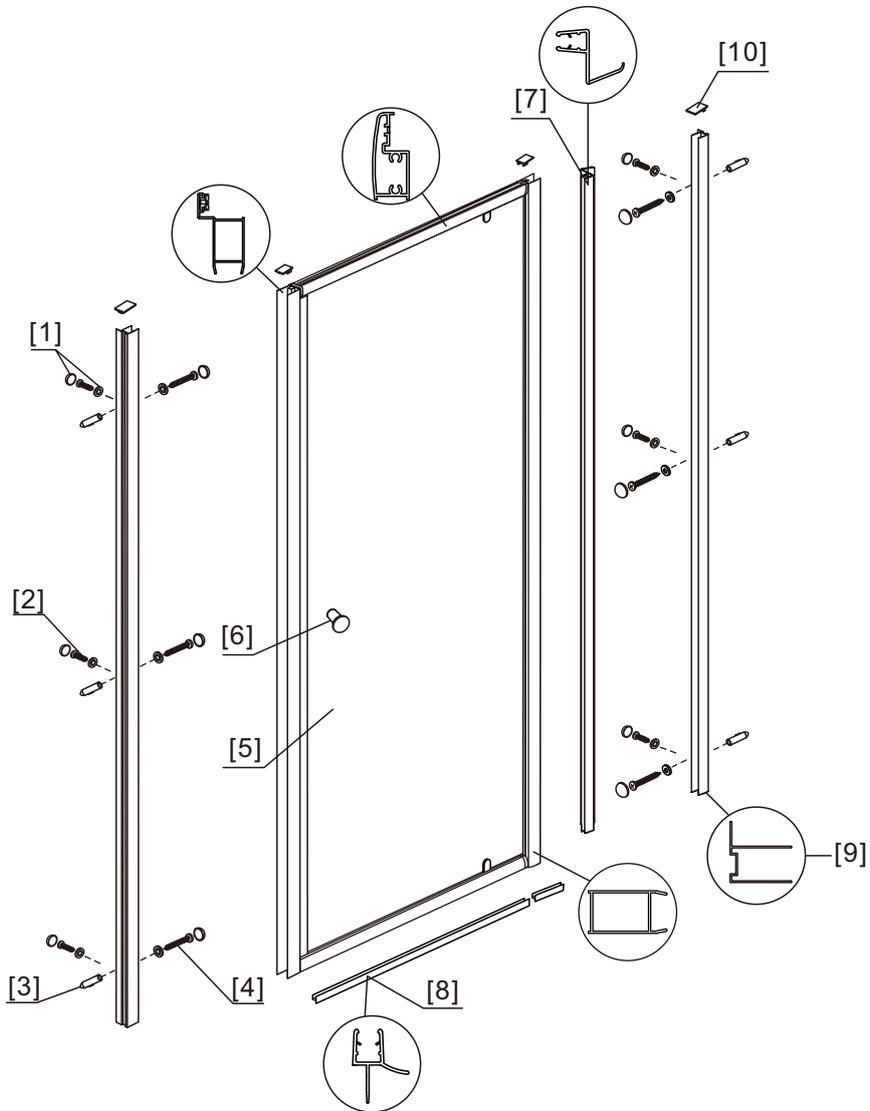

Number	Description	Picture	Quantity	Can be purchased separately	Wolseley Spare Product code
1	Screw Cover Caps		12	Y	D03097
2	Screws ST3.5x8		6	N	/
3	Wall Plugs		6	N	/
4	Screws ST4x35		6	N	/
5	Door Panel		1	N	/
6	Handle		1	Y	D03098
7	Deflector		1	Y	D03084
8	Water Deflectors		2		
9	Wall Posts		2	N	/
10	Profile Covers		4	Y	D03093

◆ Adjust The Size


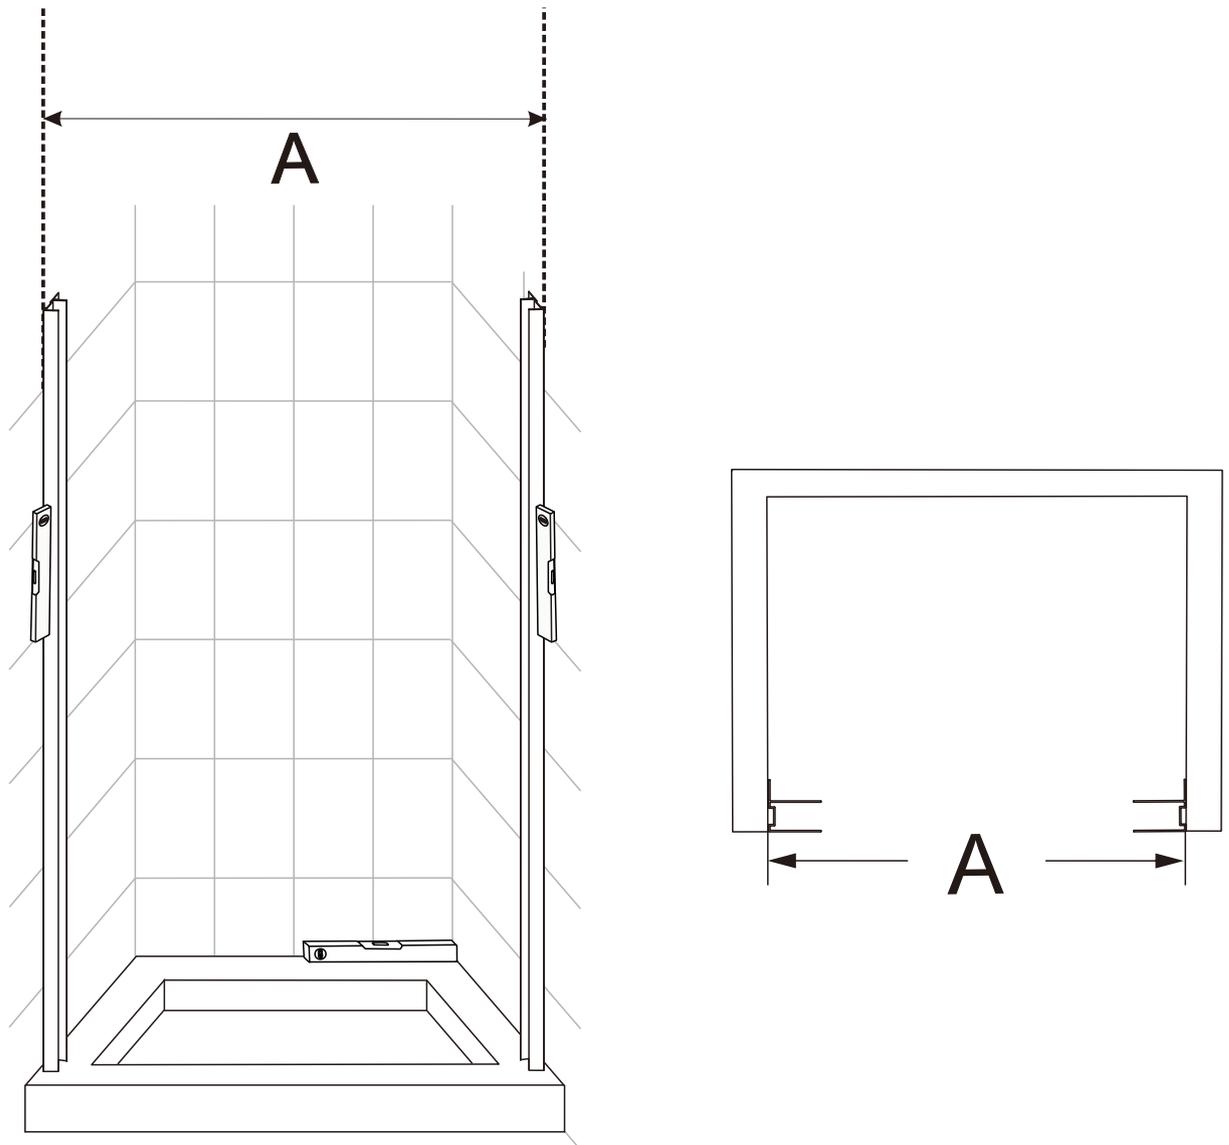


SIZE(mm)	A
700	650-690
760	710-750
800	750-790
900	850-890



◆ Installation Steps

Step 1





The profile must be checked with the spirit level whilst marking.

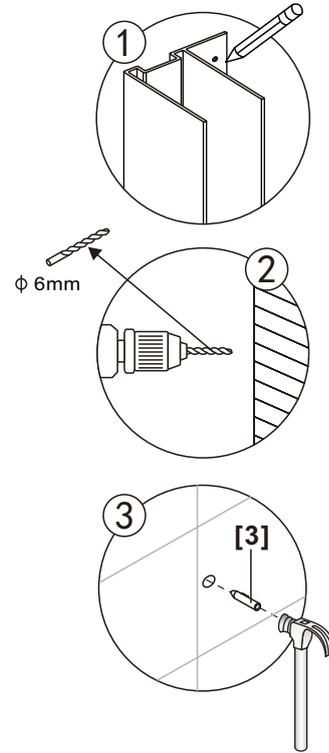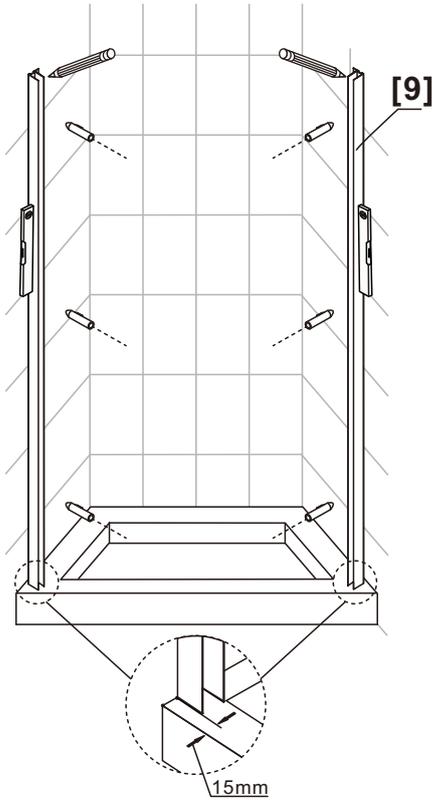

Step 2

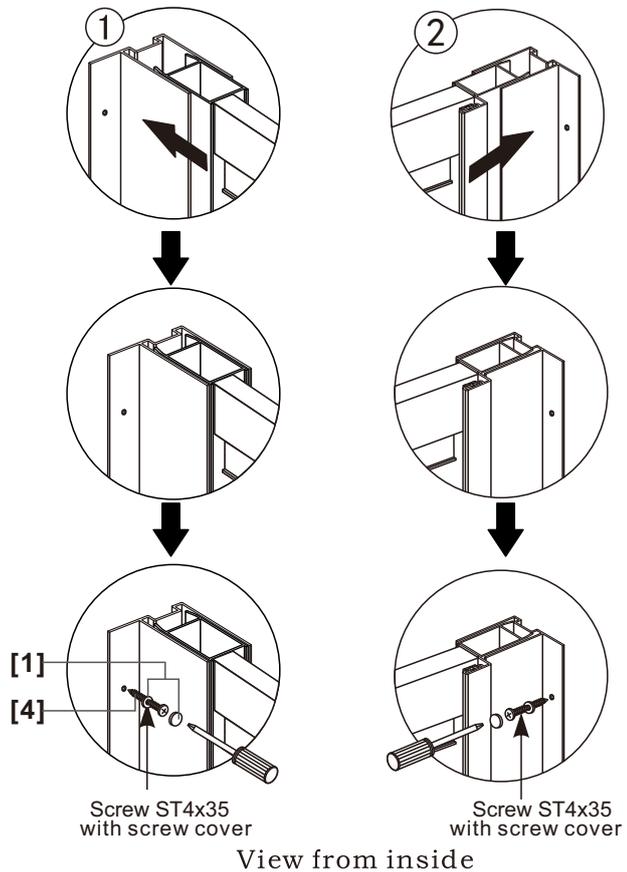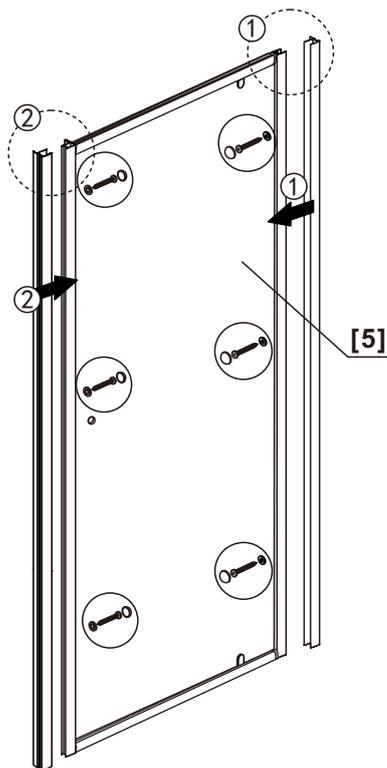




Step 3

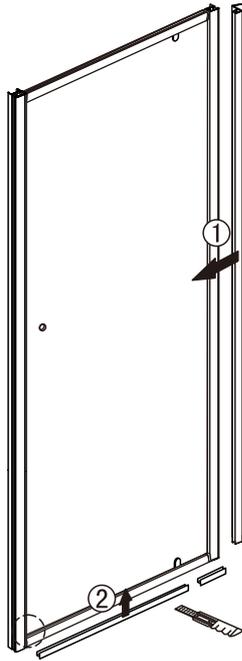


 Please cut the seal in accordance with a left or right hand opening.

 Ensure wall profiles are plumb. Adjust enclosure to be square and level. The door should open and close without catching against the frame, and have an even gap top and bottom between the door and the frame.


Step 4

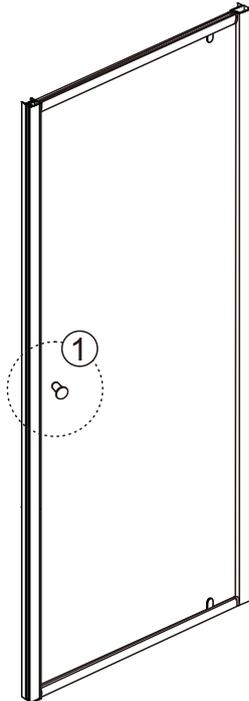

Step 5

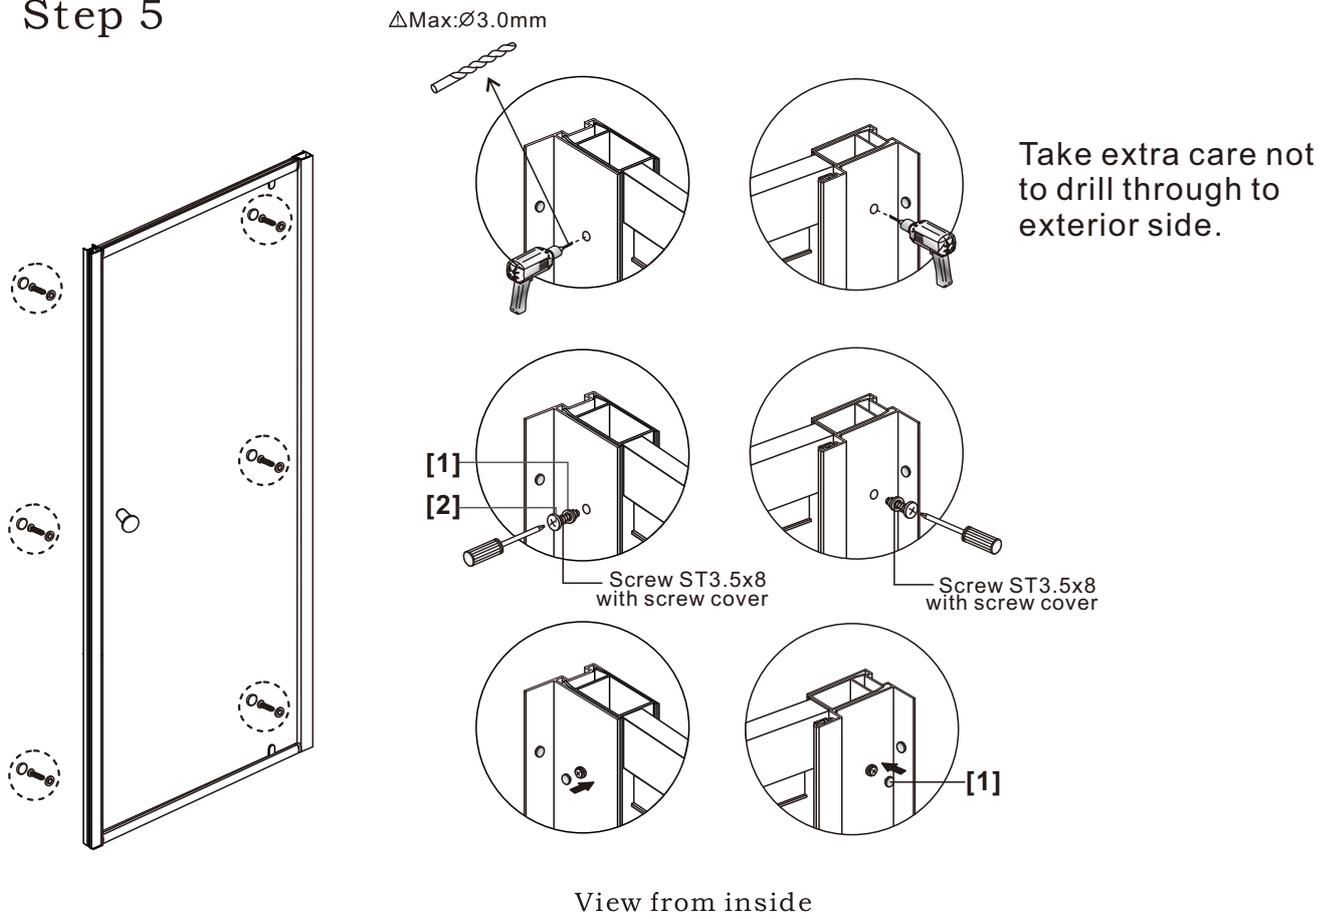

Step 6

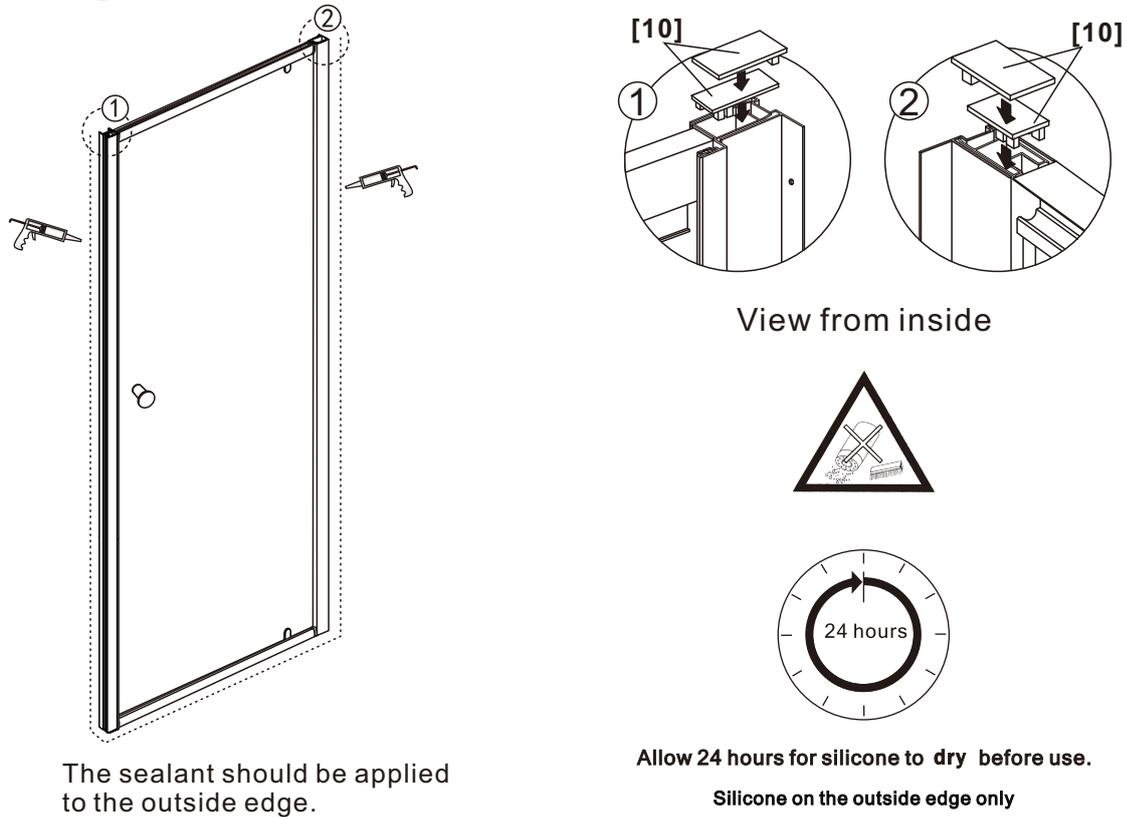

Safety Information for User & Installer

Important information for fitter:

Installation information

- It is recommended that only approved/qualified plumbers should install the product.
- Incorrect installation of the enclosure will invalidate guarantee.

Safety information prior to and during installation

- Carefully check the product for transport damage prior to installation.
- Never install damaged panels as there is a risk of spontaneous glass breakage.
- The supplied fixings/wall plugs are **only** for mounting directly on solid walls.
- It is essential that the solid, masonry/walls be inspected for adequate load-bearing capacity prior to every installation.
- The supplied fixings/wall plugs are **not for use** with stud walls such as plaster board, wood, metal or fiber board.
- Always seek professional advice to confirm wall type and appropriate type of fixing to be used for installation.
- Always check walls for concealed utility lines (power, gas, and water) prior to drilling the fixing holes.
- Ensure that fittings will not hinder the movement of the door as this may cause glass breakage.
- For hinge/pivot doors ensure that toilet bowls, wash-stands or other objects are outside of the door opening area.

Special information on handling glass

- Always protect all glass edges from damage.
- Never stand the glass on its corners throughout the installation! Place the packing material beneath the glass panel; never place the glass on tiles, concrete floors or similarly hard surfaces
- It is mandatory to check each glass panel for damage prior to installation. Never install damaged glass panels as this could cause spontaneous glass breakage!
- If the glass panel is damaged during use it must be replaced without delay. (Failure could cause a risk of spontaneous glass breakage!)

Prevent damage to glass or operation of the product.

- Ensure fittings do not hinder the movement of the door.
- Ensure that no objects are within the range of the door opening/ closing area.
- Avoid hitting the panels with hard objects such as mops when cleaning or tools during assembly. Damaged panels must be replaced as failures may cause latent glass breakage.
- Do not hit against the glass edge with hard or pointed objects (e.g. with mop handle) Damaged panels must be replaced; damage may cause spontaneous glass breakage.
- Do not use panels or handles to hang or support items such as drying towels or clothes.

Hazard information for special groups of people

- Do not allow small children, sick or disabled persons to shower unattended.
- A strong magnet is attached in the closing profile of some of the panels. This magnet could affect a pacemaker. Keep a minimum distance of 15 cm from the magnet. Consult insulation guide for location of magnets.

Maintenance Information

Service/repair and inspection required for safety

- After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary. Only use acid-free grease. We recommend silicone grease or standard household Vaseline.

Cleaning

Do not use steam cleaners, caustic or aggressive cleaning and scouring agents, cleaners that corrode plastics, or solvents containing acetone or turpentine or neat bleach.

- Do not use any cleaning agents, which according to the manufacturer's specifications may corrode aluminum or light alloys.
- Do not use glass cleaning pastes and micro-fiber cloths to prevent damage to glass coating system.
- In order to prevent the build-up of lime scale, remove any remaining drops of water after showering using a squeegee, soft cloth without any cleaning agent.
- After use, carefully rinse off all residue such as; liquid soaps, shampoos, shower gels or similar cosmetic product with water to avoid deposits.

Important: Never apply the cleaning agent for longer than necessary. After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary.

Helpline

Should you require any technical help in association with your CENTER products please call 0344 292 7062 with your query.

Warranty:5 Years

For detail warranty information, please visit our website:
www.wolseley.co.uk

Wolseley
CV34 6DY

www.wolseley.co.uk

