
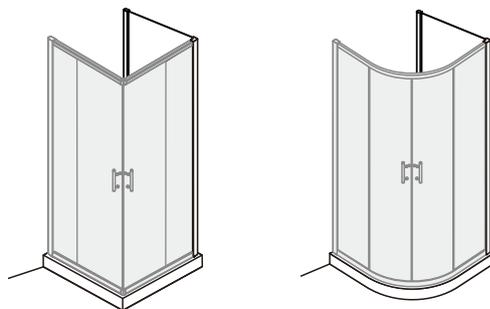


INSTALLATION INSTRUCTIONS & WARRANTY LEAFLET

D02176. D02177. D02178. D02179.

- * Center 4mm Side Panel 700 x 1850 CL/CH
- * Center 4mm Side Panel 760 x 1850 CL/CH
- * Center 4mm Side Panel 800 x 1850 CL/CH
- * Center 4mm Side Panel 900 x 1850 CL/CH

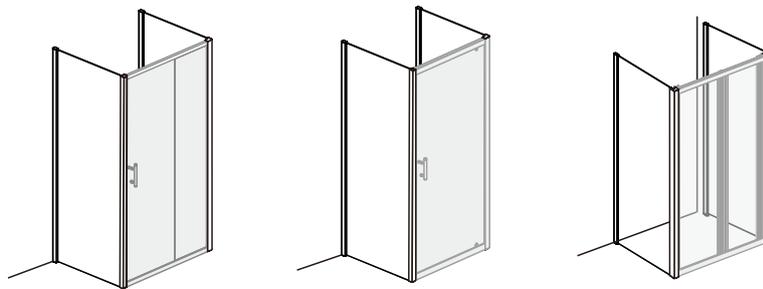

This product is compatible with below shower doors

Product Number	Description
D02161	* Center Quad 4mm Enclosure 800x800x1850
D02162	* Center Quad 4mm Enclosure 900x900x1850
D02163	* Center 4mm Sliding Door 1000x1850 CL/CH
D02164	* Center 4mm Sliding Door 1200x1850 CL/CH
D02165	* Center 5mm Pivot Door 700 x 1850 CL/CH
D02166	* Center 5mm Pivot Door 760 x 1850 CL/CH
D02167	* Center 5mm Pivot Door 800 x 1850 CL/CH
D02168	* Center 5mm Pivot Door 900 x 1850 CL/CH
D02169	* Center 5mm Bifold Door 760x1850 CL/CH
D02170	* Center 5mm Bifold Door 800x1850 CL/CH
D02171	* Center 5mm Bifold Door 900x1850 CL/CH
D02173	* Center 4mm FP Corner Entry 760x760x1850
D02174	* Center 4mm FP Corner Entry 800x800x1850
D02175	* Center 4mm FP Corner Entry 900x900x1850

IMPORTANT

Please familiarise yourself with the fitting instructions before commencing fitting.

- 1 Check that you have the tools required
- 2 Check that the installation site is compatible with size of door supplied
- 3 Check all the enclosure components
- 4 Check that the installation kit is complete


DO NOT attempt to install the product unless you can tick **ALL 4** boxes as satisfactory.

The wall plugs supplied with the installation kit are for use in solid walls. Hollow or 'stud-partition' walls will require alternative fixings.


Please consult a hardware supplier for the correct type.

It may also be necessary to consult your tiling supplier about the correct method for drilling your tiles.



Tools Required

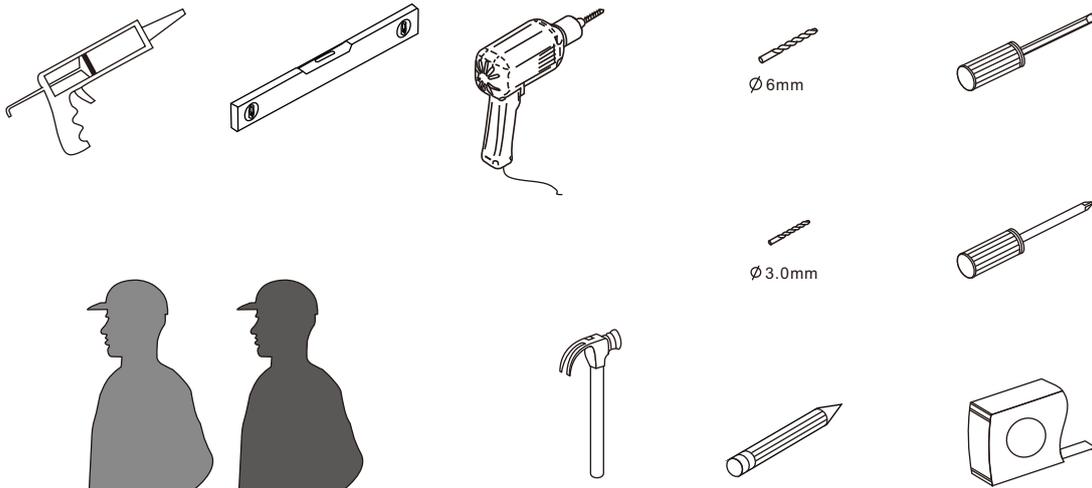


This product is heavy and may require two people to install.



◆ Side Panel Box List:(NAO6310)

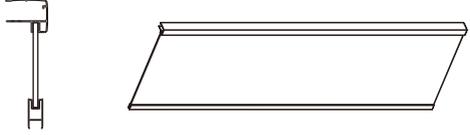
[1] 3xScrews ST3.5x8. [2] 3xScrews Cover Caps.	➔	
[3] 1xFixed Panel.	➔	
[4] 3xProfile Covers.	➔	

◆ Assembly Drawing

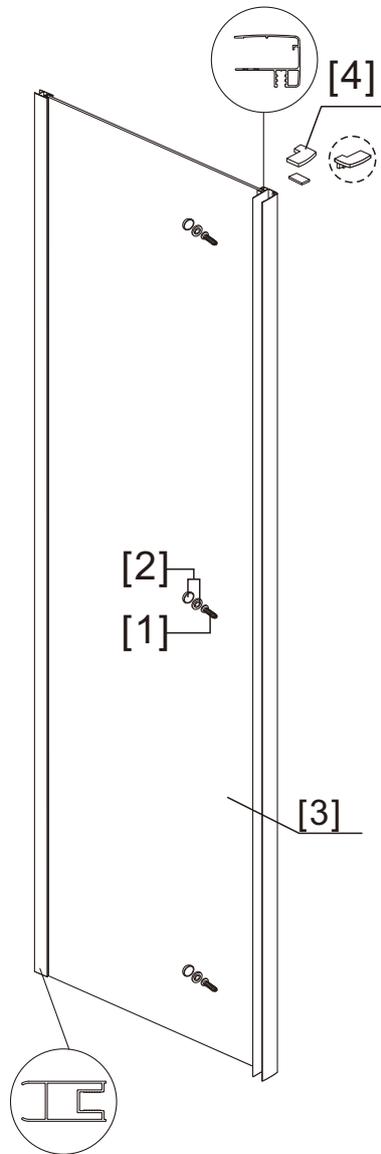

Number	Description	Picture	Quantity	Can be purchased separately	Wolseley Spare Product code
1	Screws ST3.5x8		3	N	/
2	Screws Cover Caps		3	Y	D03097
3	Fixed Panel		1	N	/
4	Profile Covers		3	Y	D03094

◆ Adjust The Size


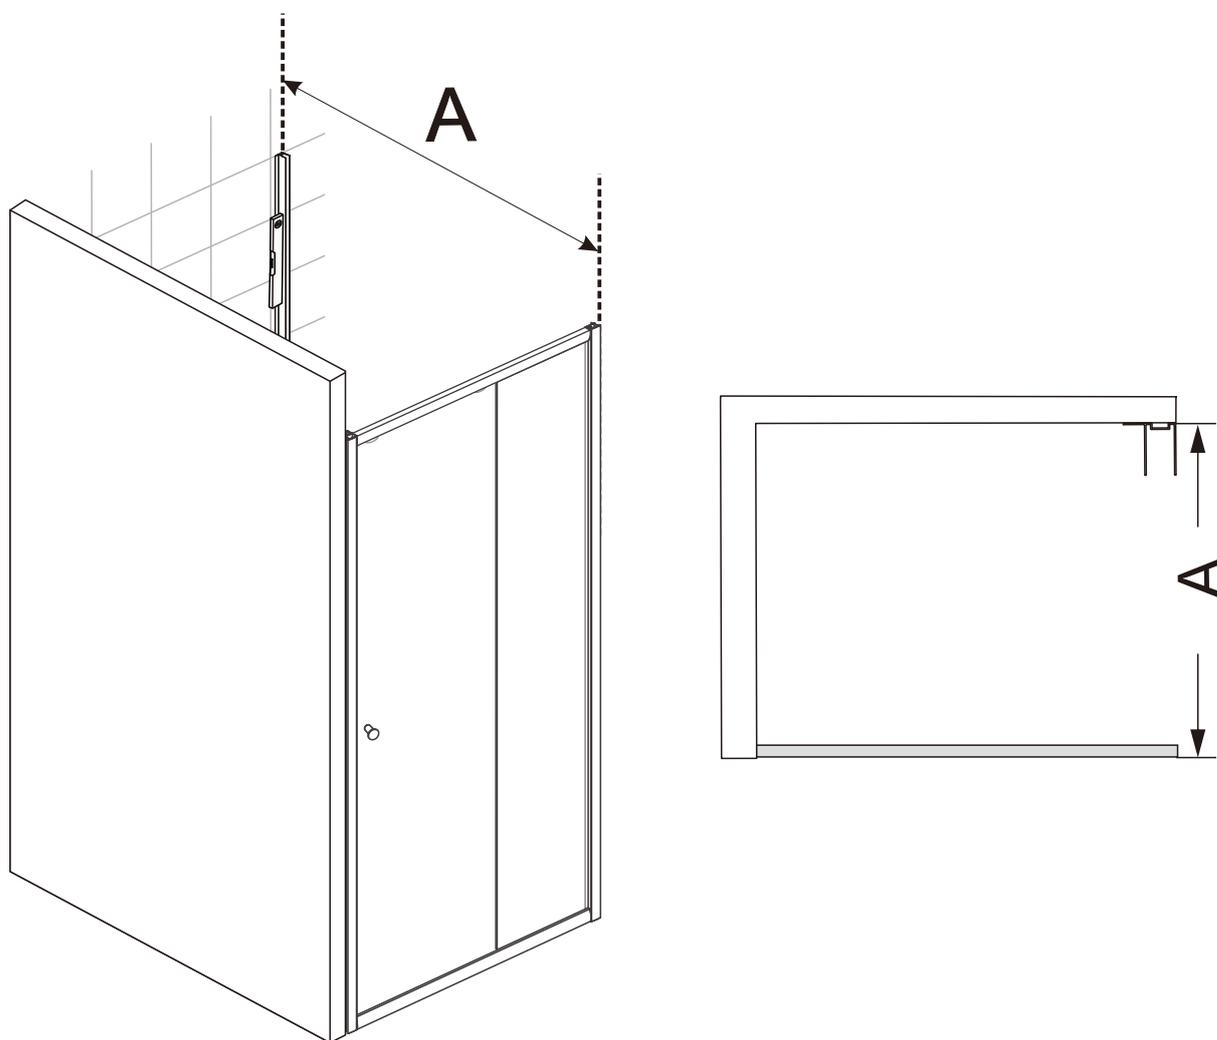


SIZE(mm)	A
700	670-690
760	730-750
800	770-790
900	870-890



◆ Installation steps:

Step 1

The profile must be checked with the spirit level whilst marking.

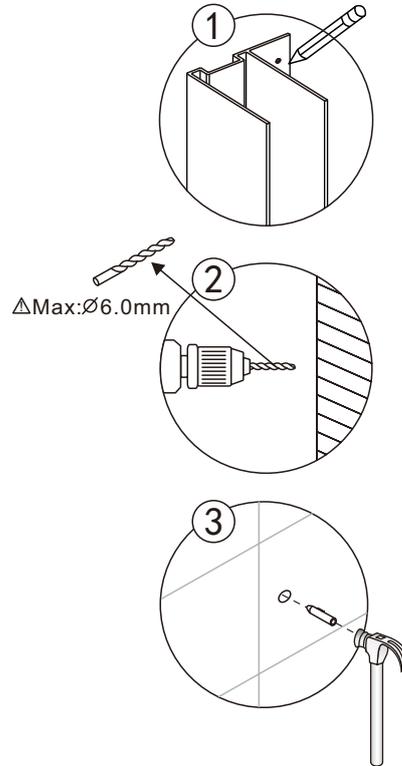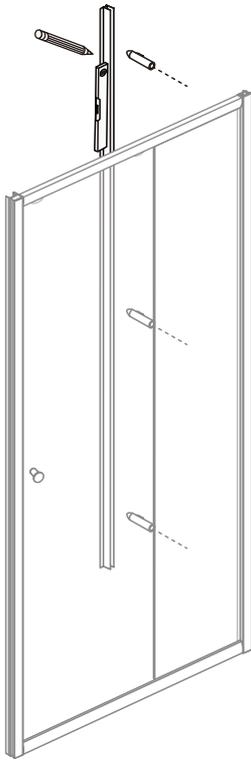

Step 2

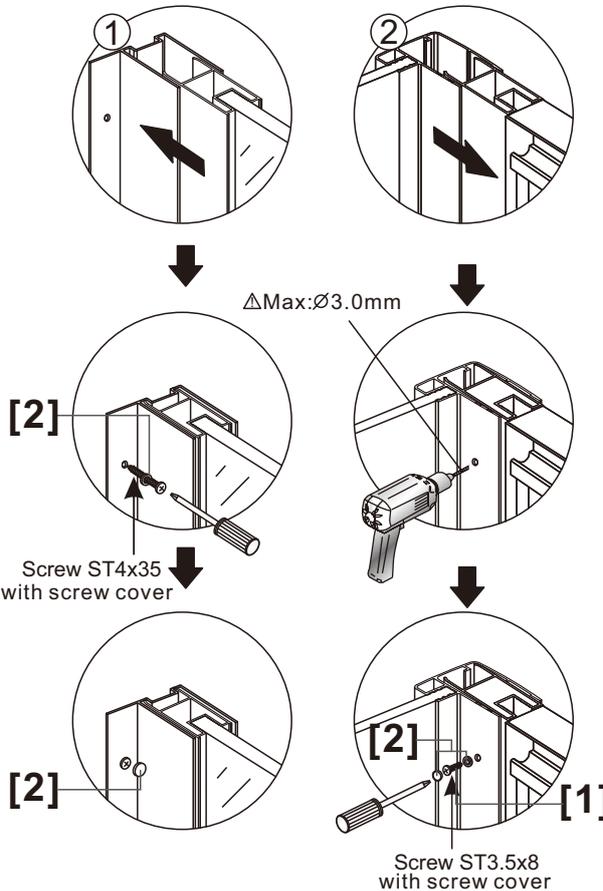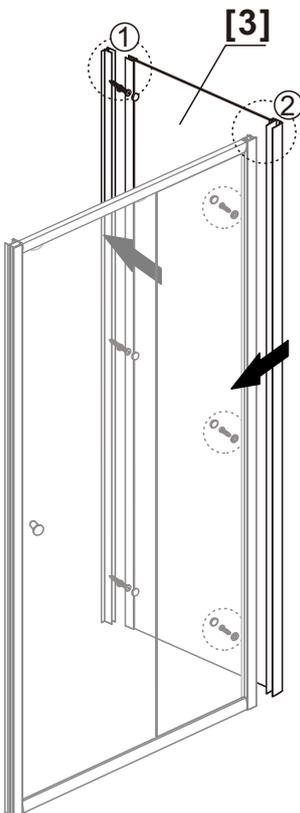


Take extra care not to drill through to exterior side.

Screw ST4x35 with screw cover


Screw ST3.5x8 with screw cover

View from inside


Step 3

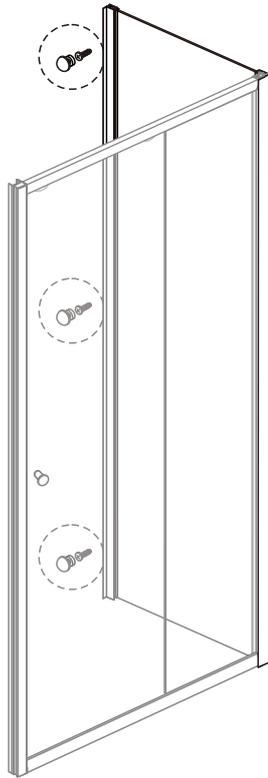



ΔMax:Ø3.0mm

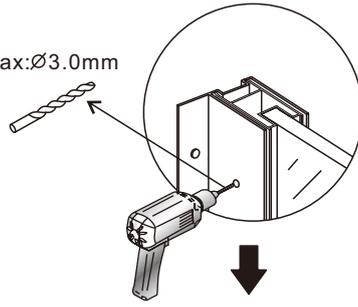

Take extra care not to drill through to exterior side.





Screw ST3.5x8 with screw cover



View from inside

Step 4

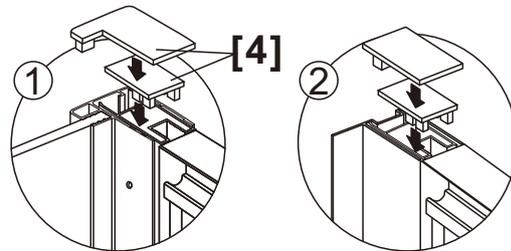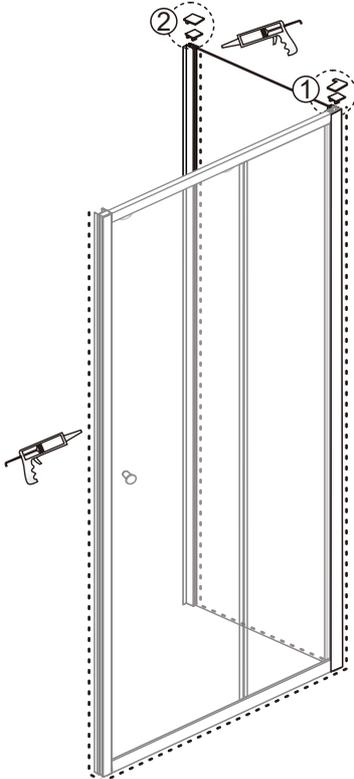

View from inside



Allow 24 hours for silicone to dry before use.

The sealant should be applied to the outside edge.

Safety Information for User & Installer

Important information for fitter:

Installation information

- It is recommended that only approved/qualified plumbers should install the product.
- Incorrect installation of the enclosure will invalidate guarantee.

Safety information prior to and during installation

- Carefully check the product for transport damage prior to installation.
- Never install damaged panels as there is a risk of spontaneous glass breakage.
- The supplied fixings/wall plugs are **only** for mounting directly on solid walls.
- It is essential that the solid, masonry/walls be inspected for adequate load-bearing capacity prior to every installation.
- The supplied fixings/wall plugs are **not for use** with stud walls such as plaster board, wood, metal or fiber board.
- Always seek professional advice to confirm wall type and appropriate type of fixing to be used for installation.
- Always check walls for concealed utility lines (power, gas, and water) prior to drilling the fixing holes.
- Ensure that fittings will not hinder the movement of the door as this may cause glass breakage.
- For hinge/pivot doors ensure that toilet bowls, wash-stands or other objects are outside of the door opening area.

Special information on handling glass

- Always protect all glass edges from damage.
- Never stand the glass on its corners throughout the installation! Place the packing material beneath the glass panel; never place the glass on tiles, concrete floors or similarly hard surfaces
- It is mandatory to check each glass panel for damage prior to installation. Never install damaged glass panels as this could cause spontaneous glass breakage!
- If the glass panel is damaged during use it must be replaced without delay. (Failure could cause a risk of spontaneous glass breakage!)

Prevent damage to glass or operation of the product.

- Ensure fittings do not hinder the movement of the door.
- Ensure that no objects are within the range of the door opening/ closing area.
- Avoid hitting the panels with hard objects such as mops when cleaning or tools during assembly. Damaged panels must be replaced as failures may cause latent glass breakage.
- Do not hit against the glass edge with hard or pointed objects (e.g. with mop handle) Damaged panels must be replaced; damage may cause spontaneous glass breakage.
- Do not use panels or handles to hang or support items such as drying towels or clothes.

Hazard information for special groups of people

- Do not allow small children, sick or disabled persons to shower unattended.
- A strong magnet is attached in the closing profile of some of the panels. This magnet could affect a pacemaker. Keep a minimum distance of 15 cm from the magnet. Consult insulation guide for location of magnets.

Maintenance Information

Service/repair and inspection required for safety

- After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary. Only use acid-free grease. We recommend silicone grease or standard household Vaseline.

Cleaning

Do not use steam cleaners, caustic or aggressive cleaning and scouring agents, cleaners that corrode plastics, or solvents containing acetone or turpentine or neat bleach.

- Do not use any cleaning agents, which according to the manufacturer's specifications may corrode aluminum or light alloys.
- Do not use glass cleaning pastes and micro-fiber cloths to prevent damage to glass coating system.
- In order to prevent the build-up of lime scale, remove any remaining drops of water after showering using a squeegee, soft cloth without any cleaning agent.
- After use, carefully rinse off all residue such as; liquid soaps, shampoos, shower gels or similar cosmetic product with water to avoid deposits.

Important: Never apply the cleaning agent for longer than necessary. After cleaning, check all the moving elements are sufficiently greased, re-grease, if necessary.

Helpline

Should you require any technical help in association with your CENTER products please call 0344 292 7062 with your query.

Warranty:5 Years

For detail warranty information, please visit our website:
www.wolseley.co.uk

Wolseley
CV34 6DY

www.wolseley.co.uk

