


F3S-Mix self-closing pillar mixer

MODEL RANGE: F3 | F3SM1001 | 2030034411

Taps | Self closing taps

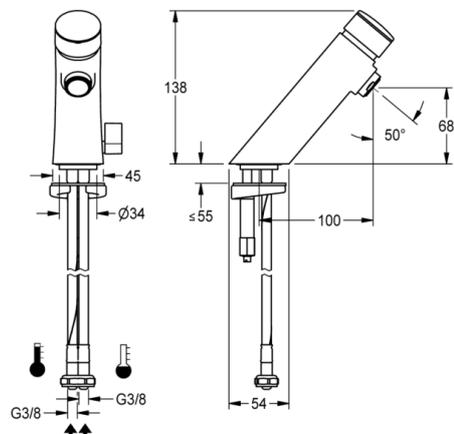

F3S-Mix self-closing pillar mixer DN 15 for sanitary facilities. Self-closing cartridge, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to hot water and cold water via hoses with integrated backflow preventer and strainers. Temperature lever with adjustable, turn-proof temperature stop. Casing, high-polished chromium-plated brass. Aerator with an integrated flow regulator 3.0 l/min.

Technical data

Type of mounting	Tap hole
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G3-8
Material fitting	Brass
Type of mixing	Yes
Sound insulation	No
Surface finish fitting	Chromed
Type of tap	Pillar tap
Calculation flow rate cold water	0.07 liter per second
Calculation flow rate hot water	0.07 liter per second
Minimum flow pressure	1.00 bar
Spout projection	100.00 mm
Volume flow rate at 3 bar	0.05 liter per second
Depressurised	No
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	No
Maximum flow time	20.00 seconds
Minimum flow time	5.00 seconds
UBA white list metal	YES
UBA white list metal fulfilled	YES
REACH regulation	YES
REACH verified	20190301.00000

F3S-Mix self-closing pillar mixer

MODEL RANGE: F3 | F3SM1001 | 2030034411

Taps | Self closing taps

Accessory Optional



PURETHERM under-table thermostat

2030012758

PURE0031
