


# F3S self-closing pillar tap

MODEL RANGE: F3 | F3SV1001 | 2030034410

Taps | Self closing taps

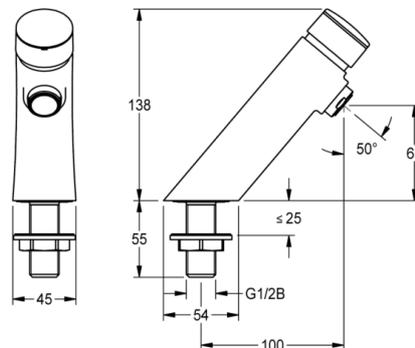

F3S Self-closing pillar tap DN 15 for sanitary facilities. Self-closing cartridge, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Casing, high-polished chromium-plated brass. Aerator with an integrated flow regulator 3.0 l/min.

| Technical data            |                        |
|---------------------------|------------------------|
| Type of mounting          | Tap hole               |
| Type of operation         | Manual operation       |
| Diameter nominal          | DN 15                  |
| Inlet size                | G 1/2 B                |
| Material fitting          | Brass                  |
| Type of mixing            | No mixing              |
| Sound insulation          | No                     |
| Surface finish fitting    | Chromed                |
| Type of tap               | Pillar tap             |
| Minimum flow pressure     | 1.00 bar               |
| Spout projection          | 100.00 mm              |
| Volume flow rate at 3 bar | 0.05 liter per second  |
| Depressurised             | No                     |
| Adjustable flow time      | Yes                    |
| Functional principle      | Hydraulic self-closing |
| Protective shutdown       | No                     |
| Thermal disinfection      | No                     |
| Maximum flow time         | 20.00 seconds          |
| Minimum flow time         | 5.00 seconds           |

# F3S self-closing pillar tap


MODEL RANGE: F3 | F3SV1001 | 2030034410

Taps | Self closing taps

---

## Accessory Optional

---



---

### Anti-twist protection

2030041946

ACSV1001

---



---

### PURETHERM under-table thermostat

2030012758

PURE0031

---