


F5L-Mix single-lever pillar mixer

MODEL RANGE: F5 | F5LM1001 | 2030029884

Taps | Manual taps

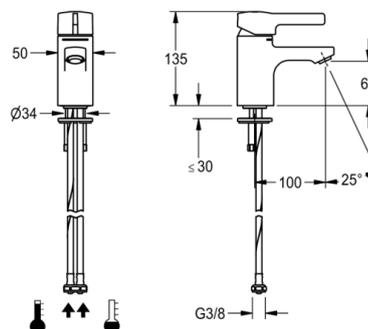

F5L-Mix single-lever mixer as pillar mixer DN 15 for sanitary facilities. Mixing cartridge with ceramic disc technology and thermostatic protection from scalding, permanently set to 41 °C and with safety switch-off in the event of failure of the cold water supply. With a mechanism for an optional hygiene unit for automatic hygiene flushing and program-controlled thermal disinfection. For connection to hot water and cold water via hoses, includes strainers. All-metal construction, high-polished chromium-plated brass. Anti-theft aerator, SLIM design, with integrated flow rate regulator 5.0 l/min, projection 100 mm.

Technical data

Type of mounting	Tap hole
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G3-8
Material fitting	Brass
Type of mixing	With thermostat / mixer
Sound insulation	No
Surface finish fitting	Chromed
Type of tap	Pillar tap
Calculation flow rate cold water	0.07 liter per second
Calculation flow rate hot water	0.07 liter per second
Minimum flow pressure	1.00 bar
Spout projection	100.00 mm
Volume flow rate at 3 bar	0.08 liter per second
Depressurised	No
Functional principle	Manual
Thermal disinfection	Prepared for automatic thermal disinfection

F5L-Mix single-lever pillar mixer

MODEL RANGE: F5 | F5LM1001 | 2030029884

Taps | Manual taps

Accessory Optional



Hygiene unit for F5L-Mix single-lever mixer

2030041256

ACLM1001



Hygiene unit for F5L-Mix

2030041262

ACLM1005



Socket

2030041325

ACLM1010



5.0 l/min. aerator

2030041326

ACXX1002
