


# F5S-Mix self-closing wall-mounted mixer

MODEL RANGE: F5 | F5SM1001 | 2030036163

Taps | Self closing taps

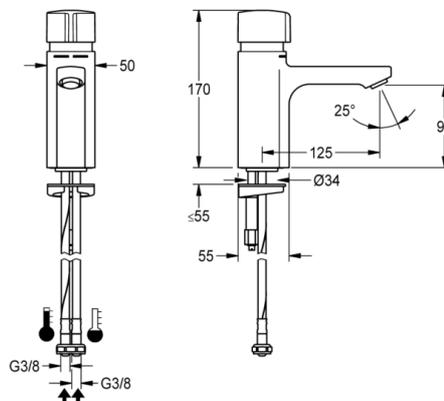

F5S-Mix self-closing pillar mixer DN 15 as single-mixer tap for sanitary facilities. FRAMIC self-closing mixing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. With adjustable, turn-proof temperature stop. For connection to hot water and cold water via hoses with integrated backflow preventer and strainers. All-metal construction, high-polished chromium-plated brass. Anti-theft aerator, SLIM design, with integrated flow regulator 5.0 l/min.

## Technical data

Type of mounting	Tap hole
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G3-8
Material fitting	Brass
Type of mixing	Yes
Sound insulation	No
Surface finish fitting	Chromed
Type of tap	Pillar tap
Calculation flow rate cold water	0.07 liter per second
Calculation flow rate hot water	0.07 liter per second
Minimum flow pressure	0.50 bar
Spout projection	125.00 mm
Volume flow rate at 3 bar	0.08 liter per second
Depressurised	No
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	No
Maximum flow time	60.00 seconds
Minimum flow time	5.00 seconds



# F5S-Mix self-closing wall-mounted mixer

MODEL RANGE: F5 | F5SM1001 | 2030036163

Taps | Self closing taps

---

## Accessory Optional

---




---

Socket for increasing the tap body by  
140 mm

2030041519  
ACSX1001

---



---

Anti-twist protection

2030035383  
ACXX1001

---



---

5.0 l/min. aerator

2030041326  
ACXX1002

---