


F5S-Therm self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2004 | 2030029011

Showers | Self closing showers

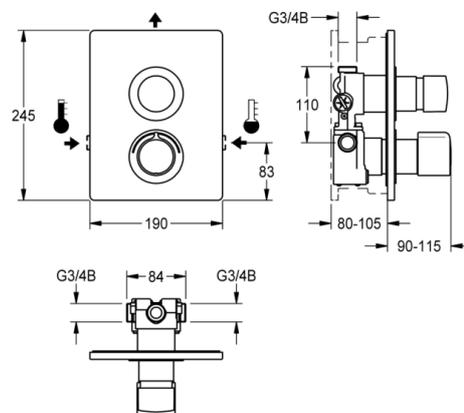

F5S-Therm self-closing thermostatic mixer DN 15 as finished installation kit for installation in basic installation kit, for shower facilities. Hydraulically controlled, connects to hot and cold water. Function block with integrated FRAMIC self-closing cartridge, thermostat and mechanism for an optional water hygiene unit for automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid valve cartridge necessary) and storage of statistical data. FRAMIC self-closing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. Thermostat with metal handle with adjustable and turn-proof temperature stop and option for manual thermal disinfection. All-metal construction, visible parts high-polished, chromium-plated. Holding frame including profile seal, stainless steel cover plate 190 x 245 mm with covered screw fixing, chromium-plated plastic rosettes, backflow preventer and strainers. Depth adjustability 25 mm.

Technical data

| | |
|-------------------------------------|---|
| Type of mounting | In-wall installation with box |
| Type of operation | Manual operation |
| Diameter nominal | DN 15 |
| Inlet size | G-3-4-B |
| Material casing | Stainless steel |
| Material fitting | Brass |
| Type of mixing | Thermostat |
| Sound insulation | No |
| Surface finish fitting | Chromed |
| Calculation flow rate cold water | 0.15 liter per second |
| Calculation flow rate hot water | 0.15 liter per second |
| Minimum flow pressure | 1.00 bar |
| Volume flow rate at 3 bar | 0.20 liter per second |
| Adjustable flow time | Yes |
| Functional principle | Hydraulic self-closing |
| Protective shutdown | No |
| Thermal disinfection | Prepared for automatic thermal disinfection |
| Additional connections | No |
| Circulation | No |
| Connection with pay water dispenser | Not possible |
| Shower pipe draining | No |
| Type of shower | In-wall fitting |
| Position of water connection | From side |
| Surface finish casing | Satin finished |
| Maximum flow time | 60.00 seconds |
| Minimum flow time | 5.00 seconds |



F5S-Therm self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2004 | 2030029011

Showers | Self closing showers

Accessory Mandatory




R5 system box

2030028990

F5BX2001

Accessory Optional



Extension set for F5S-Therm

2030044783

ACST2002



Stainless steel care set

2000109019

ZWSPL0024



Cleaning product CHROMOL 0,5 l

2000105091


ZWSPL0023



Solenoid valve cartridge

2030003033

EAQFU0001



Hygiene unit for F5S-Therm

2030041523

ACST2001
