


F5S-Therm Self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2005 | 2030037590

Showers | Self closing showers

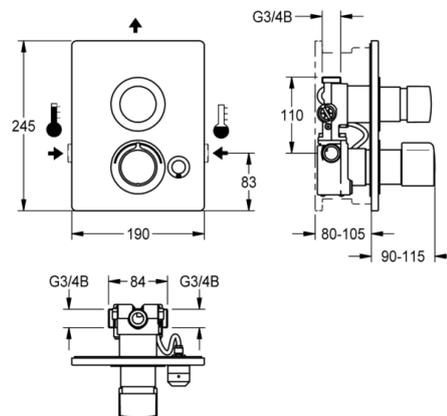

F5S-Therm self-closing thermostatic mixer DN 15 as finished installation kit for installation in basic installation kit, for shower facilities. Hydraulically controlled, connects to hot and cold water. Function block with integrated FRAMIC self-closing cartridge, thermostat and mechanism for an optional water hygiene unit for automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid valve cartridge necessary) and storage of statistical data. FRAMIC self-closing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. Thermostat with metal handle with adjustable and turn-proof temperature stop and option for manual thermal disinfection. All-metal construction, visible parts high-polished, chromium-plated. Holding frame including profile seal, stainless steel cover plate 190 x 245 mm with covered screw fixing, chromium-plated plastic rosettes, backflow preventer and strainers. Depth adjustability 25 mm. Version with automatic shower pipe draining.

Technical data

Type of mounting	In-wall installation with box
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G-3-4-B
Material casing	Stainless steel
Material fitting	Brass
Type of mixing	Thermostat
Sound insulation	No
Surface finish fitting	Chromed
Calculation flow rate cold water	0.15 liter per second
Calculation flow rate hot water	0.15 liter per second
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.20 liter per second
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	Prepared for automatic thermal disinfection
Additional connections	No
Circulation	No
Connection with pay water dispenser	Not possible
Shower pipe draining	Yes
Type of shower	In-wall fitting
Position of water connection	From side
Surface finish casing	Satin finished
Maximum flow time	60.00 seconds
Minimum flow time	5.00 seconds



F5S-Therm Self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2005 | 2030037590

Showers | Self closing showers

Accessory Mandatory




R5 system box

2030028990

F5BX2001

Accessory Optional



Extension set for F5S-Therm

2030044783

ACST2002



Stainless steel care set

2000109019

ZWSPL0024



Cleaning product CHROMOL 0,5 l

2000105091

ZWSPL0023



Solenoid valve cartridge

2030003033

EAQFU0001
