


F5S self-closing pillar tap

MODEL RANGE: F5 | F5SV1001 | 2030036165

Taps | Self closing taps

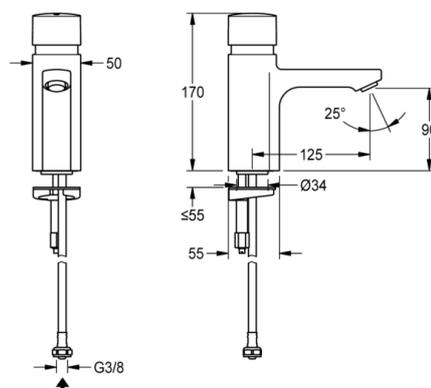

F5S self-closing pillar tap DN 15 for sanitary facilities. FRAMIC self-closing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water via hose including strainer seal. All-metal construction, high-polished chromium-plated brass. Anti-theft aerator, SLIM design, with integrated flow regulator 5.0 l/min.

Technical data

Type of mounting	Tap hole
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G3-8
Material fitting	Brass
Type of mixing	No mixing
Sound insulation	No
Surface finish fitting	Chromed
Type of tap	Pillar tap
Calculation flow rate cold water	0.15 liter per second
Minimum flow pressure	0.50 bar
Spout projection	125.00 mm
Volume flow rate at 3 bar	0.08 liter per second
Depressurised	No
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	No
Maximum flow time	60.00 seconds
Minimum flow time	5.00 seconds



F5S self-closing pillar tap

MODEL RANGE: F5 | F5SV1001 | 2030036165

Taps | Self closing taps


Accessory Optional



Socket for increasing the tap body by 140 mm

2030041519

ACSX1001



Anti-twist protection

2030035383

ACXX1001



5.0 l/min. aerator

2030041326

ACXX1002



PURETHERM under-table thermostat

2030012758

PURE0031
