


SHOWER PANEL

PR300024 | 2030020185

PRODUCT GROUP : Showers | ARTICLE FAMILY : Electronic self closing shower | ARTICLE GROUP : PR300023 ++ |
 MODEL RANGE : AQUA

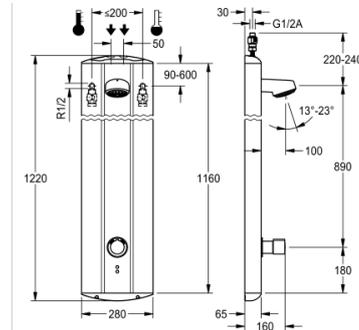

PROTRONIC - A3000 open stainless steel shower panel for on-wall installation, with opto-electronically control. Activation by hand reflection and subsequently switch to body reflection. With thermostatic mixer DN 15 and shower head AQUAJET-Comfort with plastic jet face, infinitely angle-adjustable plastic jet face 13° - 23° and flow controller 0.15 l/s (0.10 l/s and 0.20 l/s enclosed), flexible high pressure hose connections with lockable water quantity regulators, thermostat with metal grip cap, for connection to hot and cold water adjustable flow duration, down to the second, visible parts of fitting polished chromium-plated brass, housing made of profiled stainless steel with plastic profile cover caps. Provides facility for thermal disinfection, manual or automatic via optional bypass solenoid cartridge, as well as the facility for chargeable water delivery with AQUAPAY coin-operated controller and for externally controlling the options such as fitting settings and communication via ECC function controller, 24 V DC.

Dimensions of housing 280 x 1220 x 65 mm (W x H x D)

TECHNICAL DATA

| | |
|-------------------------------------|---------------------------------------|
| Gross weight | 13.40 kg |
| Net weight | 10.30 kg |
| additional connections | no |
| calculation flow rate cold water | 0.15 litre per second |
| calculation flow rate hot water | 0.15 litre per second |
| circulation | no |
| connection with pay water dispenser | single / multiple pay water dispenser |
| default automatic hygiene flushing | 24h after the last activity |
| adjustable flow time | no |
| Functional principle | electronic self-closing |
| Diameter nominal | DN 15 |
| Material casing | stainless steel |
| material code casing | 1.4301 Chrome Nickel steel V2A |
| Material fitting | BRASS |
| minimum flow pressure | 1.00 bar |
| minimum flow time | 1.00 seconds |
| Type of mixing | with thermostat |
| Overall depth | 65.00 mm |
| Overall height | 1,220.00 mm |
| Overall width | 280.00 mm |
| power supply connection | A3000 open 24 V DC |
| position of power connection | from top / backside |

| | |
|------------------------------|---|
| power consumption | 2.5 |
| Protective system IP | IP68 |
| protective shutdown | yes |
| shower pipe draining | no |
| Sound insulation | no |
| Surface finish casing | satin finished |
| Surface finish fitting | CHROMISED |
| thermal disinfection | prepared for automatic thermal disinfection |
| adjustable tilt angle | yes |
| Type of mounting | WALL-MOUNTING |
| Type of operation | sensor operation |
| type of sensor | opto-electronic sensor |
| type of shower | shower panel |
| type of shower head | spray shower head |
| volume flow rate bypass | 0.06 litre per second |
| volume flow rate at 3 bar | 0.20 litre per second |
| position of water connection | from top / backside |
| hygiene flushing | yes |
| Inlet size | G-1-2-A |