




<b>Product</b>	MATRIX SMALL wash basin with overflow
<b>Item number</b>	R2020000 VVS:636857100 NRF:6132501 RSK:7502999 EAN:5708590325064 HMI: 82610 NBS:N13:30,335
<b>Colour</b>	White
<b>Product description</b>	<p>MATRIX SMALL wash basin, 600 x 490 x 130 mm, with two integrated handrails in the front, tap hole Ø36 mm, with overflow. Supplied with drain fitting. The wash basin has raised edges, preventing water from running over the back or down the outer sides.</p> <p>Materials: Cultured marble with a high-polished, pore-free sanitary gel coating. Suitable for wash basin brackets from the Pressalit PLUS and SELECT ranges.</p>
<b>Adjustment height</b>	
<b>Product capacity</b>	200 kg.
<b>Materials</b>	Cultured marble with a high-polished, pore-free sanitary gel coating.
<b>Warranty</b>	Pressalit makes a commitment to remedy material and manufacturing defects for a period of five years from the invoicing date.
<b>Cleaning</b>	<p>For cleaning the wash basin, use hot water and a mild soapy cleaning agent. Make sure that the product is wiped down with a soft rag wrung out in clear water immediately after cleaning.</p> <p>For disinfecting the wash basin, the following agents can be used:</p> <ul style="list-style-type: none"><li>Sodium hydroxide 5%</li><li>Acetic acid solution 10%</li><li>Ethanol solution 70%</li><li>Sodium hypochlorite 5%, active chlorine</li><li>Sodium chloride 170g/l, diluted to 50%.</li></ul> <p>Make sure that the product is wiped down with a soft rag wrung out in clear water immediately after disinfection.</p> <p><b>NB! Do not use abrasive cleaning agents, as this will cause damage to the surface of the wash basin.</b></p>
<b>Declaration of conformity</b>	This product is produced in accordance with EN 14688:2015.



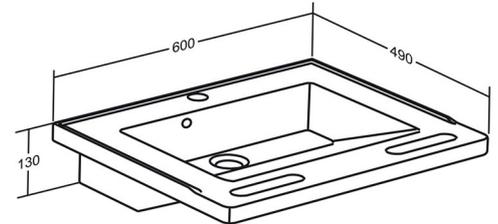

# PRESSALIT®

<b>Product</b>	MATRIX SMALL wash basin with overflow
	<p><b>Declaration of Performance</b> Compliance criteria according to EN 14688:2015.</p> <p>4.1 Load resistance: stable, without cracks or deformations.</p> <p>4.2 Draining of water: Water drained away completely.</p> <p>4.3 Resistance to temperature changes: Without cracks, delaminations.</p> <p>4.4 Resistance to chemicals and staining agents:</p> <ul style="list-style-type: none"><li>- Sodium hydroxide 5% - without staining or deterioration;</li><li>- Acetic acid solution 10% - without staining or deterioration;</li><li>- Ethanol sol. 70% - without staining or deterioration;</li><li>- Sodium hypochlorite 5% active chlorine - without staining or deterioration;</li><li>- Sodium chloride 170g/l diluted to 50% - without staining or deterioration.</li></ul> <p>4.5 Surface stability / resistance to scratching: Do not use abrasives on the surface.</p> <p>4.6 Cleanability: Smooth, non-absorbant surfaces.</p> <p>4.7 Protection against overflowing: CL 10.</p> <p>4.8 Durability: Product is considered durable.</p>



[www.pressalit.com](http://www.pressalit.com)

Pressalit A/S  
Pressalitvej 1  
DK-8680 Ry  
Tel.: +45 8788 8788  
Fax: +45 8788 8789  
E-mail: [pressalit@pressalit.com](mailto:pressalit@pressalit.com)

# PRESSALIT®