


Specification Sheet

Part No.	Description	Last Updated
SA0630P	Large Quick Release Cubicle Door Lock (Inward Opening)	28/12/17

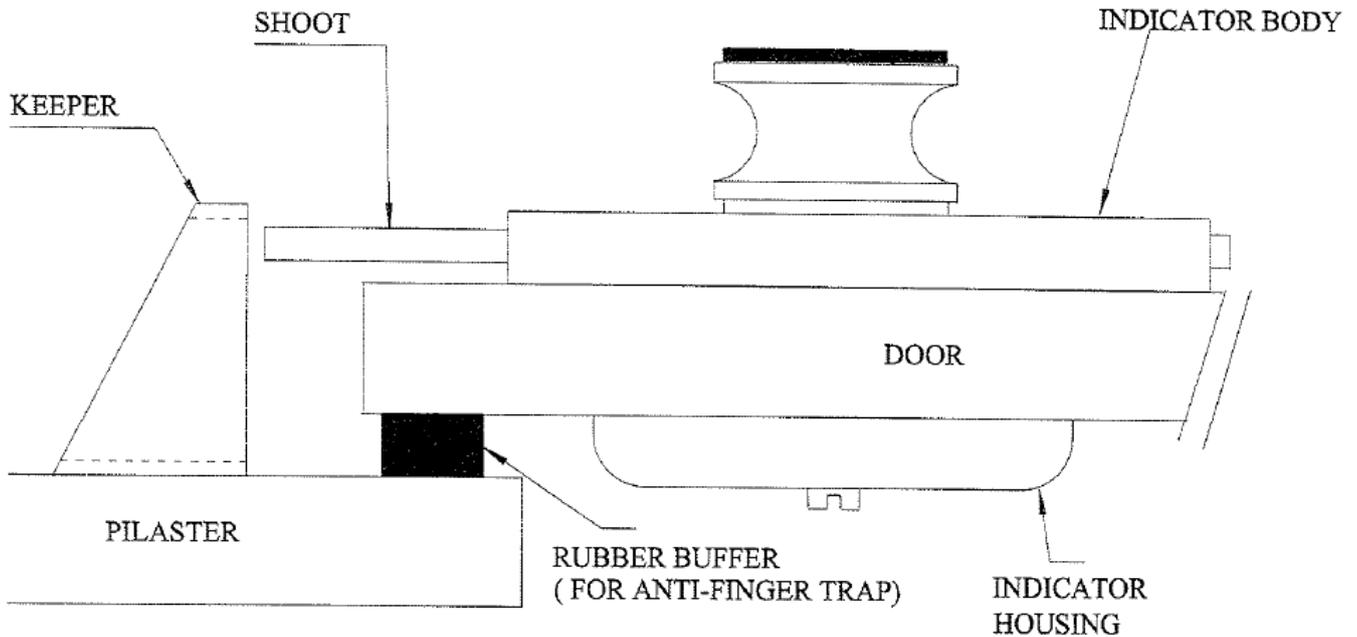

1. Remove bolt from packing card. Separate body from housing by removing 2no. M5 x 20csk. screws. Retain screws for later use.
2. Offer the round indicator housing into the 2 no pre-drilled holes in door. Ensure the spring loaded steel op. pin fits through slot in door and into the wide slot in the back of the red/green indicator disk, with shoot protruding 38mm towards the door edge when in engaged position. Check indicator shows red when in this position. If green colour is showing, remove housing from door and rotate red/green disc to next position, ensuring op. pin again locates in slot.
3. Re-position on door as 2.
4. Secure both parts together through door with the 2 no. M5 x 20 csk. Screws initially removed in 1.
5. Drill through 2 remaining holes in body for no 8 x 1" esk pozi. wood screws x 15mm deep into face of door using 1.5mm dia. drill or start hole with bradawl/punch. Fit screws in holes and secure tightly.
6. Remove the 2 no black buffers from screw bag and mark hole positions approx. 150mm from top and bottom of inside pilaster with hole centres approx. 10-12mm in from edge. Fix off with 2 off No. 8 x 3/4" black round hd. pozi screws supplied.
7. With door in closed position and bolt engaged position offer up box keep to protruding bolt shoot and mark position of 2 no holes. Slide back bolt handle into vacant position and open door, checking door and shoot do not foul on keep.
8. Fit keep using 2 off no 6 x 3/4" zince plated round hd. screws supplied.