

SOLO-NMT LL

SOLO Tap Range Solo Non-Thermostatic Tall Pillar Healthcare Tap with Long Lever Handle



Specification

| | |
|-----------------------------------|--------------------------|
| Style: | Contemporary |
| Product Type: | Commercial |
| Main Construction Material: | Brass |
| Mount Type: | Deck Mounted |
| Handle Type: | Lever |
| Connection Inlet: | 15mm Compression |
| Connection Outlet: | M24 Flow Straightener |
| Number of Tap Holes: | 1 |
| Valve/Cartridge Type: | 35mm Cartridge |
| Plumbing System Requirements: | All |
| Working Pressure Range: | Min 0.5 Bar, Max 5.0 Bar |
| Maximum Hot Water Temperature: °C | 80 |
| Maximum Dynamic Pressure: (bar) | 5 |
| Maximum Static Pressure: (bar) | 10 |
| Flow Type: | Single |
| Flow Rate: (l/min @ 3 bar) | 5.3 |
| Isolation Included: | No |

Features:

- Pressure balancing tall basin mixer tap with long lever handle
- Maximum temperature stop is adjustable for user safety and comfort
- Removable spout to aid infection control regimes
- A choice of fully draining or laminar flow outlets supplied
- Smooth machined internal waterways to help limit the build-up of bacteria within the tap body

Product Certifications:




WRAS Certificate No: 1711006

WRAS Expiry Date: 30/11/2022

For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

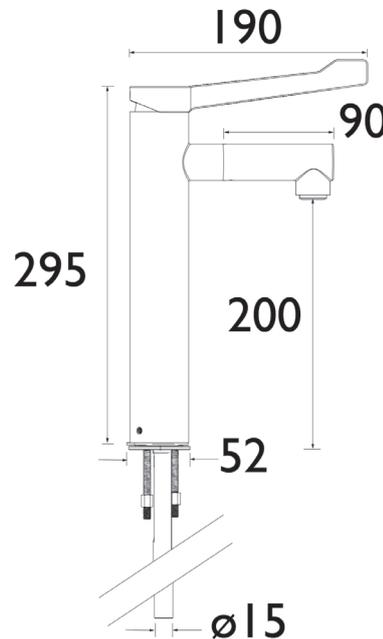

Flow Rates (l/min)

| System Pressure (bar) | 0.5 | 1 | 2 | 3 | 5 |
|-----------------------|-----|-----|-----|-----|-----|
| SOLO-NMT LL | 3.5 | 4.5 | 5.1 | 5.3 | 6.8 |

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D2