

# SOLO-NM SL

## SOLO Tap Range Solo Non-Thermostatic Health-care Tap short lever handle



### Specification

<b>Style:</b>	Contemporary
<b>Product Type:</b>	Commercial
<b>Main Construction Material:</b>	Brass
<b>Mount Type:</b>	Deck Mounted
<b>Handle Type:</b>	Lever
<b>Connection Inlet:</b>	15mm Compression
<b>Connection Outlet:</b>	M24 Flow Straightener
<b>Number of Tap Holes:</b>	1
<b>Valve/Cartridge Type:</b>	35mm Cartridge
<b>Plumbing System Requirements:</b>	All
<b>Working Pressure Range:</b>	Min 0.5 Bar, Max 5.0 Bar
<b>Maximum Hot Water Temperature: °C</b>	80
<b>Maximum Dynamic Pressure: (bar)</b>	5
<b>Maximum Static Pressure: (bar)</b>	10
<b>Flow Type:</b>	SingleFlow
<b>Flow Rate: (l/min @ 3 bar)</b>	5.3
<b>Isolation Included:</b>	No

### Features:

- Pressure balancing basin mixer tap with short lever handle
- Maximum temperature stop is adjustable for user safety and comfort
- Removable spout to aid infection control regimes
- A choice of fully draining or laminar flow outlets supplied
- Smooth machined internal waterways to help limit the build-up of bacteria within the tap body

### Product Certifications:




WRAS Certificate No: 1711006

WRAS Expiry Date: 30/11/2022

For more products, visit our website:  
<http://www.bristan.com>



### Dimensions (measurements in mm)

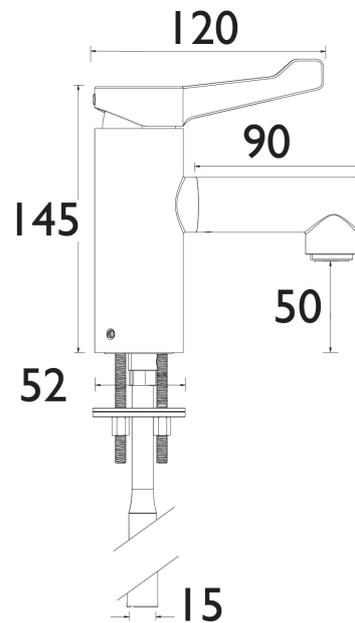

### Flow Rates (l/min)

System Pressure (bar)	0.5	1	2	3	5
SOLO-NM SL	3.5	4.5	5.1	5.3	6.8

TECHNICAL  
DATA  
SHEET



**BRISTAN**  
TAPS & SHOWERS D2