

TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout

Ref. 20870T1

Stainless steel swivelling spout H. 160mm L. 185mm

DESCRIPTION

TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout - Ref. 20870T1

Electronic basin mixer with high, removable, swivelling BIOCLIP spout H. 160mm.
 Supplied with 2 removable stainless steel spouts L.185mm Ø 28mm.
 Independent IP65 electronic control unit.
 Mains supply via 230/12V transformer.
 Flow rate limited to 7 lpm at 3 bar.
 Chrome-plated solid brass body with reinforced fixing via 2 stainless steel rods.
 Body and spout with smooth interiors (reduces niches where bacteria can develop).
 Adjustable duty flush (preset to approx. 60 secs every 24h after last use) to prevent water stagnation in the network in the event of prolonged periods of non-use.
 Thermal shocks are possible.
 Shockproof infrared presence detection sensor.
 Hygiene lever L. 100mm controls temperature.
 PEX flexibles with filters and M3/8" solenoid valve.
 Anti-blocking safety.
 Solenoid valves are upstream of the mixing chamber.
 10-year warranty.
 Two shut-off options:
 - Standard mode: timed flow with automatic shut-off.
 - ON/OFF mode: user shuts off flow voluntarily after 30 minutes.
 Position the sensor to the side of the mixer in the On/Off mode.

TECHNICAL CHARACTERISTICS

TEMPOMATIC MIX electronic mixer with removable BIOCLIP spout - Ref. 20870T1

Connector	M3/8"
Technology	Electronic
Height	280mm
Drop height	160mm
Spout length	185mm
Flow rate	7 lpm
Finish	Chrome-plated brass
Norms	  



ADVANTAGES



Automatic duty flush limits bacterial development




BIOCLIP spout enables interior cleaning/descaling



Smooth spout and body limit bacteria



Fractionnement du puisage

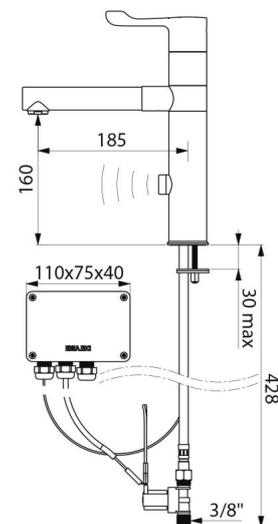

Warranty

