


Cistern

MODEL RANGE: FLUSHING-TAPS-CONV | FLSY0002 | 2030020903

Flushing systems | Cisterns

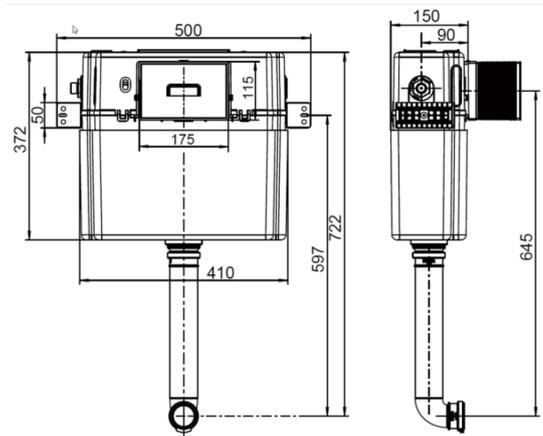

Cistern with small inspection opening and protective box for construction, for rear mounting in a service room as a concealed cistern with anticondensation insulation (9-3 l oder 6-3 l), flushing function transmitted via highly flexible pressure spirals, flush-pipe elbow with construction protection, filling valve with noise group I, corner valve G 1/2 B. Note: The controls and WC connector set are not part of the scope of supply of the cistern.

Technical data

Type of mounting	Concealed mounting
Sound insulation	1
Maximum flush water volume	9.00 liter
Minimum flush water volume	6.00 liter
Type of flushing fitting	WC cistern