


F5S-Therm self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2004 | 2030029011

Showers | Self closing showers

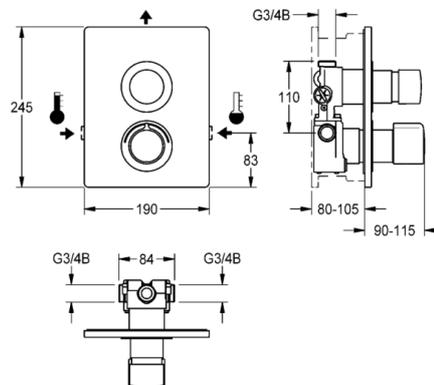

F5S-Therm self-closing thermostatic mixer DN 15 as finished installation kit for installation in basic installation kit, for shower facilities. Hydraulically controlled, connects to hot and cold water. Function block with integrated FRAMIC self-closing cartridge, thermostat and mechanism for an optional water hygiene unit for automatic water hygiene flushing, program-controlled thermal disinfection (additional bypass solenoid valve cartridge necessary) and storage of statistical data. FRAMIC self-closing cartridge, hydraulically controlled, low-maintenance and stagnation-free, with ceramic disc technology, self-closing, flow pressure-independent due to medium-separated design. Stepless adjustment of flow duration. Thermostat with metal handle with adjustable and turn-proof temperature stop and option for manual thermal disinfection. All-metal construction, visible parts high-polished, chromium-plated. Holding frame including profile seal, stainless steel cover plate 190 x 245 mm with covered screw fixing, chromium-plated plastic rosettes, backflow preventer and strainers. Depth adjustability 25 mm.

Technical data

Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G-3-4-B
Material casing	Stainless steel
Material fitting	Brass
Type of mixing	Thermostat
Sound insulation	No
Surface finish fitting	Chromed
Calculation flow rate cold water	0.15 liter per second
Calculation flow rate hot water	0.15 liter per second
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.20 liter per second
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	Prepared for automatic thermal disinfection
Additional connections	No
Circulation	No
Connection with pay water dispenser	Not possible
Shower pipe draining	No
Type of shower	In-wall fitting
Position of water connection	From side
Surface finish casing	Satin finished
Maximum flow time	35.00 seconds
Minimum flow time	5.00 seconds



F5S-Therm self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2004 | 2030029011

Showers | Self closing showers

Accessory Mandatory




R5 Franke system box for in-wall mixer

2030028990

F5BX2001


Accessory Optional



Extension set for F5S-Therm

2030044783

ACST2002



Solenoid valve cartridge

2030003033

EAQFU0001



Hygiene unit for F5S-Therm

2030041523

ACST2001

Spare Parts



Cover

2030003258

EAQLT0002



Temperature handle

2030047082


ASXT9003



Temperature stop

2030003296

EAQLT0003



Rosette

2030047081

ASXT9002

F5S-Therm self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2004 | 2030029011

Showers | Self closing showers

Spare Parts



Thermocouple
2030003300
EAQLT0004



Plug chromed
2030053006
ASSX9004



Push cap
2030049943
ASST2001



Guide ring
2030048356
ASSX9002



Safety ring
2030048357
ASSX9003




Rosette
2030048765
ASET2006



FRAMIC Self-closing cartridge
2030046145
ASSX9001



Backflow preventer DN 6
2030045816
ASXX9002




Spare part set
2030045818
ASLM2005



Strainer seal 16 x 8 x 1.6 mm
2000104720
ASXX1012



Backflow preventer DN 10
2000104687
ASXX9010




Holding frame
2030045472
ASXX9001

F5S-Therm self-closing thermostatic mixer

MODEL RANGE: F5 | F5ST2004 | 2030029011

Showers | Self closing showers


Spare Parts



Cover plate stainless steel

2030050136


ASST2003



Cover plate stainless steel

2030050138

ASST2004



Drain valve

2000105133

ESHOW0069



Pneumatic hose

2000106114

ESHOW0070



Stainless steel care set

2000109019

ZWSPL0024



Cleaning product CHROMOL

2000105091

ZWSPL0023



Disassembly tool

2030047203

ACXX9003