


Geberit AquaClean Sela WC complete solution, wall-hung WC



Example image

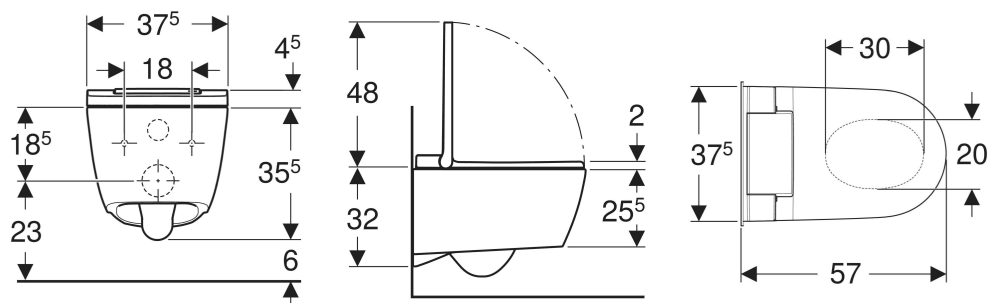

APPLICATION PURPOSES

- For convenient toilet use
- For gently cleaning the anal and vaginal areas with water

CHARACTERISTICS

- Water heating via continuous flow heater
- Anal shower with WhirlSpray shower technology
- Separate Lady shower nozzle in protected resting position
- Adjustable shower water temperature
- Spray intensity can be set to five different levels
- Spray arm can be set to five different positions
- Adjustable oscillating spray (automatic forward and reverse motion of the spray arm)
- Automatic pre- and postrinsing of the spray nozzle with fresh water
- Descaling programme
- Wall-hung
- Rimless WC ceramic appliance featuring TurboFlush flush technology
- Horizontal outlet
- Washdown WC
- User detection
- WC seat ring and WC lid with soft-closing mechanism
- WC lid with SoftOpening
- WC seat ring and WC lid with quick release

- Activation of the orientation light via brightness sensor
- Orientation light can be set in seven colours
- Functions and settings via remote control
- Three user profiles can be programmed
- Compatible with Geberit Home App
- Water supply connection on the left, hidden behind the WC ceramic
- Mains connection with flexible three-core sheathed cable, on the right side, hidden behind the WC ceramic
- External water supply connection on the left possible with accessories
- External mains connection with power outlet on the right possible
- Approval in accordance with (DIN) EN 1717 / (DIN) EN 13077

TECHNICAL DATA

Degree of protection	IPX4
Nominal voltage	230 V AC
Mains frequency	50 Hz
Power consumption in standby mode max.	0.5 W
Flow pressure	0.5–10 bar
Operating temperature	5–40 °C
Water temperature, adjustment range	34–40 °C
Minimum flow pressure	0.5 bar

Calculated flow rate	0.02 l/s
Spray time	50 s
WC seat load max.	150 kg
Odour extraction unit	No
SoftOpening	Yes
With WC seat ring heating	No
With orientation light	Yes
With dryer functionality	No

SCOPE OF DELIVERY

- Water supply connection set for Sigma and Omega concealed cisterns 12 cm, installation height 112 cm
- Female socket for mains connection
- Sound insulation set
- Descaling agent, 125 ml
- Cleaning set
- Remote control with wall-mounted holder and battery CR2032
- Fastening material

TO ORDER ADDITIONALLY

- Geberit straight connector with sleeve and cover caps

ACCESSORIES

- Wall-mounted control panel for Geberit AquaClean Sela
- Wall-mounted control panel, touchless, for Geberit AquaClean

- Interface module 4.1 V for Geberit AquaClean Mera / Sela
- Interface module 12 V for Geberit AquaClean Mera/Sela

- Wall-mounted holder, large, theft-proof, for Geberit AquaClean remote controls (from year of manufacture 2024)

INFO

- This product is supplied with the Geberit AquaClean descaling agent. This consumable contains classified hazardous substances. Information, instructions and measures for handling hazardous substances safely can be found at www.geberit.com.

<i>Art. no.</i>	<i>Colour / surface</i>	<i>B</i> <i>cm</i>	<i>H</i> <i>cm</i>	<i>T</i> <i>cm</i>	<i>Protection class</i>	<i>Power consumption</i> <i>W</i>	<i>QuickRelease function</i>
146.220.11.1	WC ceramic appliance: white / KeraTect Design cover: white / glossy	37.5	40	57	I	1850	Yes, WC seat ring and WC lid
146.220.21.1	WC ceramic appliance: white / KeraTect Design cover: chrome / glossy	37.5	40	57	I	1850	Yes, WC seat ring and WC lid
146.220.JT.1	WC ceramic appliance, Design cover: white / matt	37.5	40	57	I	1850	Yes, WC seat ring and WC lid