


F3S self-closing gate valve

MODEL RANGE: F3 | F3SV2003 | 2030034416

Showers | Self closing showers

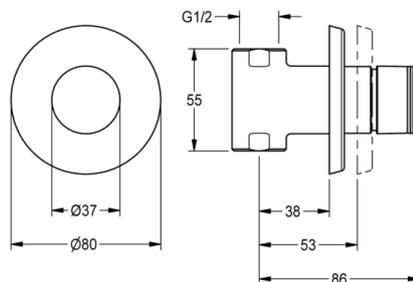

F3S self-closing straight-way valve DN 15 for in-wall mounting with noise-reducing styrene cladding, for shower facilities. Self-closing functional part, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Casing including changeable valve seat, with internal thread G 1/2, visible parts high-polished, chromium-plated brass. With rosette, depth adjustability 15 mm.

Technical data


Type of mounting	In-wall installation without box
Type of operation	Manual operation
Diameter nominal	DN 15
Material fitting	Brass
Type of mixing	No mixing
Sound insulation	No
Surface finish fitting	Chromed
Calculation flow rate cold water	0.15 liter per second
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.20 liter per second
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	No
Additional connections	No
Circulation	No
Connection with pay water dispenser	Not possible
Shower pipe draining	No
Type of shower	In-wall fitting
Position of water connection	From bottom
Maximum flow time	35.00 seconds
Minimum flow time	5.00 seconds
UBA white list metal	YES
UBA white list metal fulfilled	YES
REACH regulation	YES
REACH verified	20190301.00000

F3S self-closing gate valve

MODEL RANGE: F3 | F3SV2003 | 2030034416

Showers | Self closing showers


Accessory Optional



Extension set

2000101451

AQRM900



Valve seat key

2000101454

AQRM967

Spare Parts



Functional element

2000104352

ESHOW0001
