


F3S self-closing gate valve

MODEL RANGE: F3 | F3SV2005 | 2030040072

Showers | Self closing showers

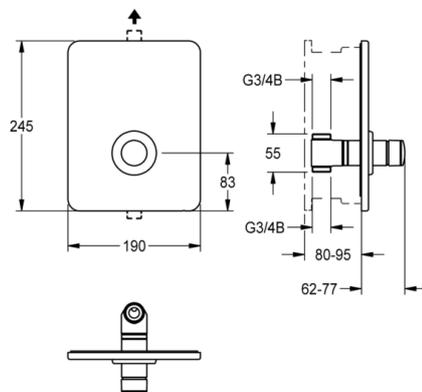

F3S self-closing straight-way valve DN 15 as finished installation kit for installation in basic installation kit, for shower facilities. Self-closing functional part, hydraulically controlled, piston-free design, self-closing, stepless adjustment of flow duration. For connection to pre-mixed hot water or cold water. Housing including changeable valve seat, visible parts, high-polished chromium-plated brass. Holding frame including profile seal, stainless steel cover plate 190 x 245 mm with covered screw fixing and rosette. Depth adjustability 20 mm.

Technical data

Type of mounting	In-wall installation with box
Type of operation	Manual operation
Diameter nominal	DN 15
Inlet size	G-3-4-B
Material casing	Stainless steel
Material fitting	Brass
Type of mixing	No mixing
Sound insulation	No
Surface finish fitting	Chromed
Calculation flow rate cold water	0.15 liter per second
Minimum flow pressure	1.00 bar
Volume flow rate at 3 bar	0.20 liter per second
Adjustable flow time	Yes
Functional principle	Hydraulic self-closing
Protective shutdown	No
Thermal disinfection	No
Additional connections	No
Circulation	No
Connection with pay water dispenser	Not possible
Shower pipe draining	No
Type of shower	In-wall fitting
Position of water connection	From bottom
Surface finish casing	Satin finished
Maximum flow time	35.00 seconds
Minimum flow time	5.00 seconds

F3S self-closing gate valve

MODEL RANGE: F3 | F3SV2005 | 2030040072

Showers | Self closing showers

Accessory Mandatory




R3 system box

2030040069

F3BV2001


Accessory Optional



Extension set

2000101451

AQRM900



Valve seat key

2000101454

AQRM967

Spare Parts



Functional element

2000104352

ESHOW0001
