


DUH HOSPITAL DISPOSAL UNIT: G22016L

G22016L | 2000100397

ARTICLE GROUP : **G22016 ++** | ARTICLE FAMILY : **Slop hopper** | PRODUCT GROUP : **Hospital equipment**

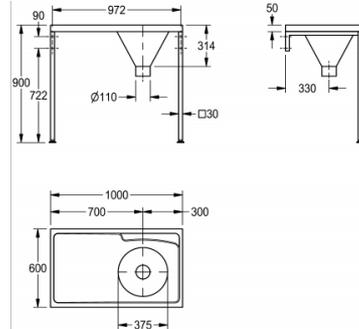

A DUH hospital disposal unit manufactured from 1.2mm thick, grade 1.4301 (304) stainless steel with a satin polish finish. The top is turned down on all four edges and incorporates a wet area recess. Fitted with a sluice hopper at one end, the hopper has a 110mm dia. outlet which can accept a P or S trap, available as an extra. 9 litre capacity plastic cistern with plastic downpipe is available, these are fitted with a 13mm HP brass valve, plastic float and CP metal flushing lever handles. The unit should only be fed from a cistern or tank water supply.

L or R after the code number refers to the handing of the drainer ie. left or right when facing front of unit.

Unit can be mounted on either stainless steel cantilever brackets or Front leg supports give a working height of 900mm and have adjustable feet which can be screwed to the floor for extra stability.

Manufactured in accordance with the old HTM64 standard and the Health Building Notes 00-10, part C

Left hand drainer

TECHNICAL DATA

Bowl height	300.00 mm
Bowl finish	Descaled
Bowl depth	375.00 mm
Drainer position	LEFT
Drainer or storage	DRAINER
Gross weight	12.50 kg
Material	Stainless steel
Material code	1.4301 Chrome Nickel steel V2A
Material thickness	1.20 mm
Minimum flushing capacity	6.00 liter
Outlet size	DN 100
Overall depth	600.00 mm
Overall height	900.00 mm
Overall width	1,000.00 mm
Surface finish	satin finished
Type of mounting	wall and floor mounting
Net weight	11.30 kg
Product code	207.0000.063