

SHOWER TOWER

ANGLED TOP ELECTRONIC WAVE-ON

SH01-002


Standard angled top shower tower, suitable for high security applications. Concealed pipework, ligature resistant. Set temperature. Electronic wave-on sensor operation.

PRODUCT NUMBER

SH01-002

TECHNICAL DATA

Material	316 Stainless Steel
Surface finish	Brushed
Gross weight	5.20 kg
Type of operation	Sensor
Type of mounting	Wall mounted
Type of mixing	External TMV maybe required
Failsafe close	Yes
Water connection	15mm rear entry
Minimum flow pressure	1.00 bar
Adjustable run time	Yes* Default - 1min Options: 30 secs, 1, 2, 3, 4 & 5 mins
Adjustable range	Yes* Default - 2 Options: 1, 2 & 3 (10mm - 75mm)
Wave-on & Wave-off	Default - OFF* Options: ON or OFF
Anti-vandal function	Yes
Automatic purge	Yes* Default - OFF Options: 3, 6, 12, 24, 36 & 48 hours
Purge run time	Default - 1min* Options: 30 secs, 1, 2, 4 & 8 mins
Lock outs	Default - OFF* Options: 4, 6, 8 & 10 ops
Power source	Mains or battery

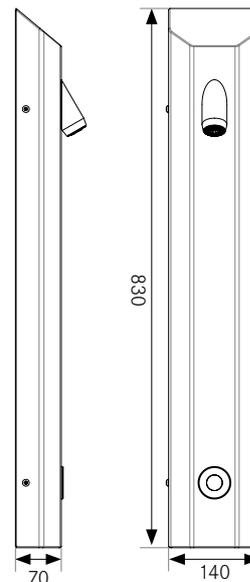

ALL DIMENSIONS IN MM

Last updated:
2015-03-10, Dart Valley Systems

DVS
Dart Valley Systems
a FRANKE company

*Can be set using the DVS Handheld Programmer